

IP65



VILLALUMI

CURATED IN SPAIN

CURATED IN SPAIN

LEIGHT

2026




About Us

Welcome to Villalumi, your premier lighting supplier dedicated to illuminating spaces with innovative, high-quality lighting solutions. With a commitment to excellence, we offer a broad range of products, from energy-efficient LEDs to elegant decorative fixtures, designed to meet the unique needs of our clients across various industries.

Our team brings years of expertise in the lighting industry, ensuring that every solution is tailored to enhance aesthetics, functionality, and sustainability. We work closely with architects, interior designers, and contractors to provide lighting solutions that not only meet but exceed expectations. Whether you're outfitting a residential space or a commercial environment, we're here to help create the perfect ambiance with the right light.




01	Outdoor Track Lights NEW	1-32
02	Outdoor Lights NEW	33-46
03	Pendant Lights NEW	47-56
04	Wall Lights NEW	57-60



VILLALUMI
CURATED IN SPAIN

OUTDOOR TRACK LIGHTS

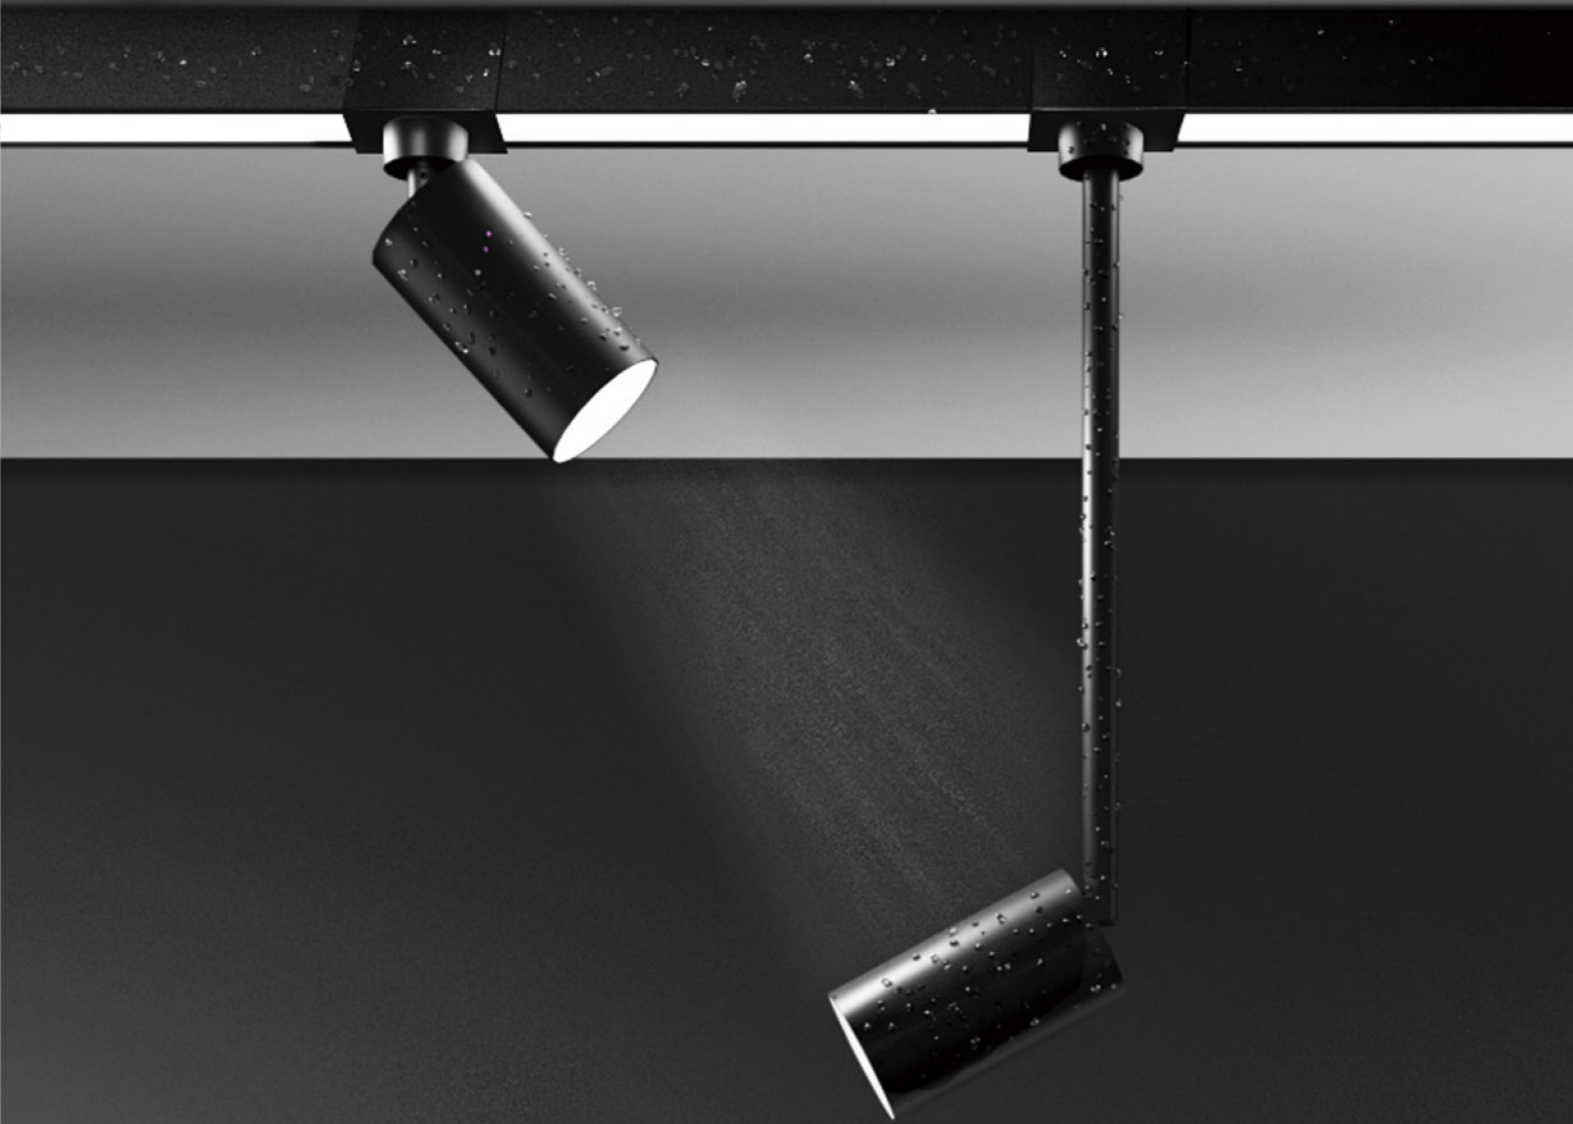


THE PLUG-IN
IN HUMID ENVIRONMENTS

Archimedes outdoor track lighting is composed of a track, which can not only serve as a independent lighting fixture for diffused illumination, but also act as a base and provide power for one or more additional plug-in lights at any location.

Traditional light systems, characterized by an electrified track and a series of fixtures that can be positioned and powered from the track itself, are not usable in all those humid environments that require an adequate degree of protection.


Archimedes with its innovative plug-in installation system, provides a high degree of protection on all elements of the system and provides a flexible illumination of any space that requires effects of diffuse linear light combined with accent lighting effects. Its elegance and aesthetic simplicity makes it also suitable for any indoor environment.

Mechanical installation and electrical plug-in

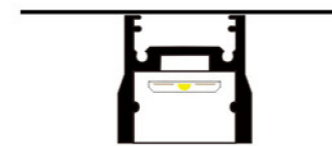


Side covers

Internal aluminium profile that houses the silicone strip



1. Metal clips for the mechanical attachment of the plug-in product to the profile
2. Pins for the electrical connection

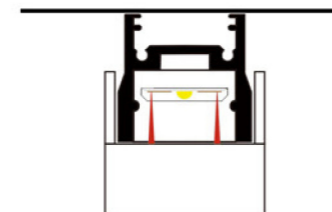

Pins pierce the silicone strip and ensure the electrical connection of plug-in products

The plug-in
in humid environments
is now possible.

Design is the process of conveying an idea through sensible planning and careful thinking

Spa and wellness centers

Porches, patio and roof gardens

Wineries

...and also for interiors in general



Outdoor Track
410590

Wide
application
solutions



Straight tube Chandelier
410578



Φ35 Long Spotlights
410580

Φ35 Short Spotlights
410579

5 Heads Grille lamp
410582

10 Heads Grille lamp
410583


A series of plug-in products with different features and functions connect to the Highlighter light rod. The Flower plug-in adjustable projectors, in 3 variants, can direct the beam in any direction enhancing the chosen subject. Trendy plug-in and Ceiling plug-in downlights have fixed optics and create defined accent effects from top to bottom. All elements of the system are available in black and white. The internal profile of Highlighter is always in black anodized aluminum.

Outdoor bright scenes

The combination of outdoor track lights allow for spatial coordination, with linear light and shadow releasing large and high-quality spaces.

Outdoor bright scenes

Outdoor track lighting system has strong waterproofness that allows the installation of plug-in products anywhere in the system and their possible repositioning.

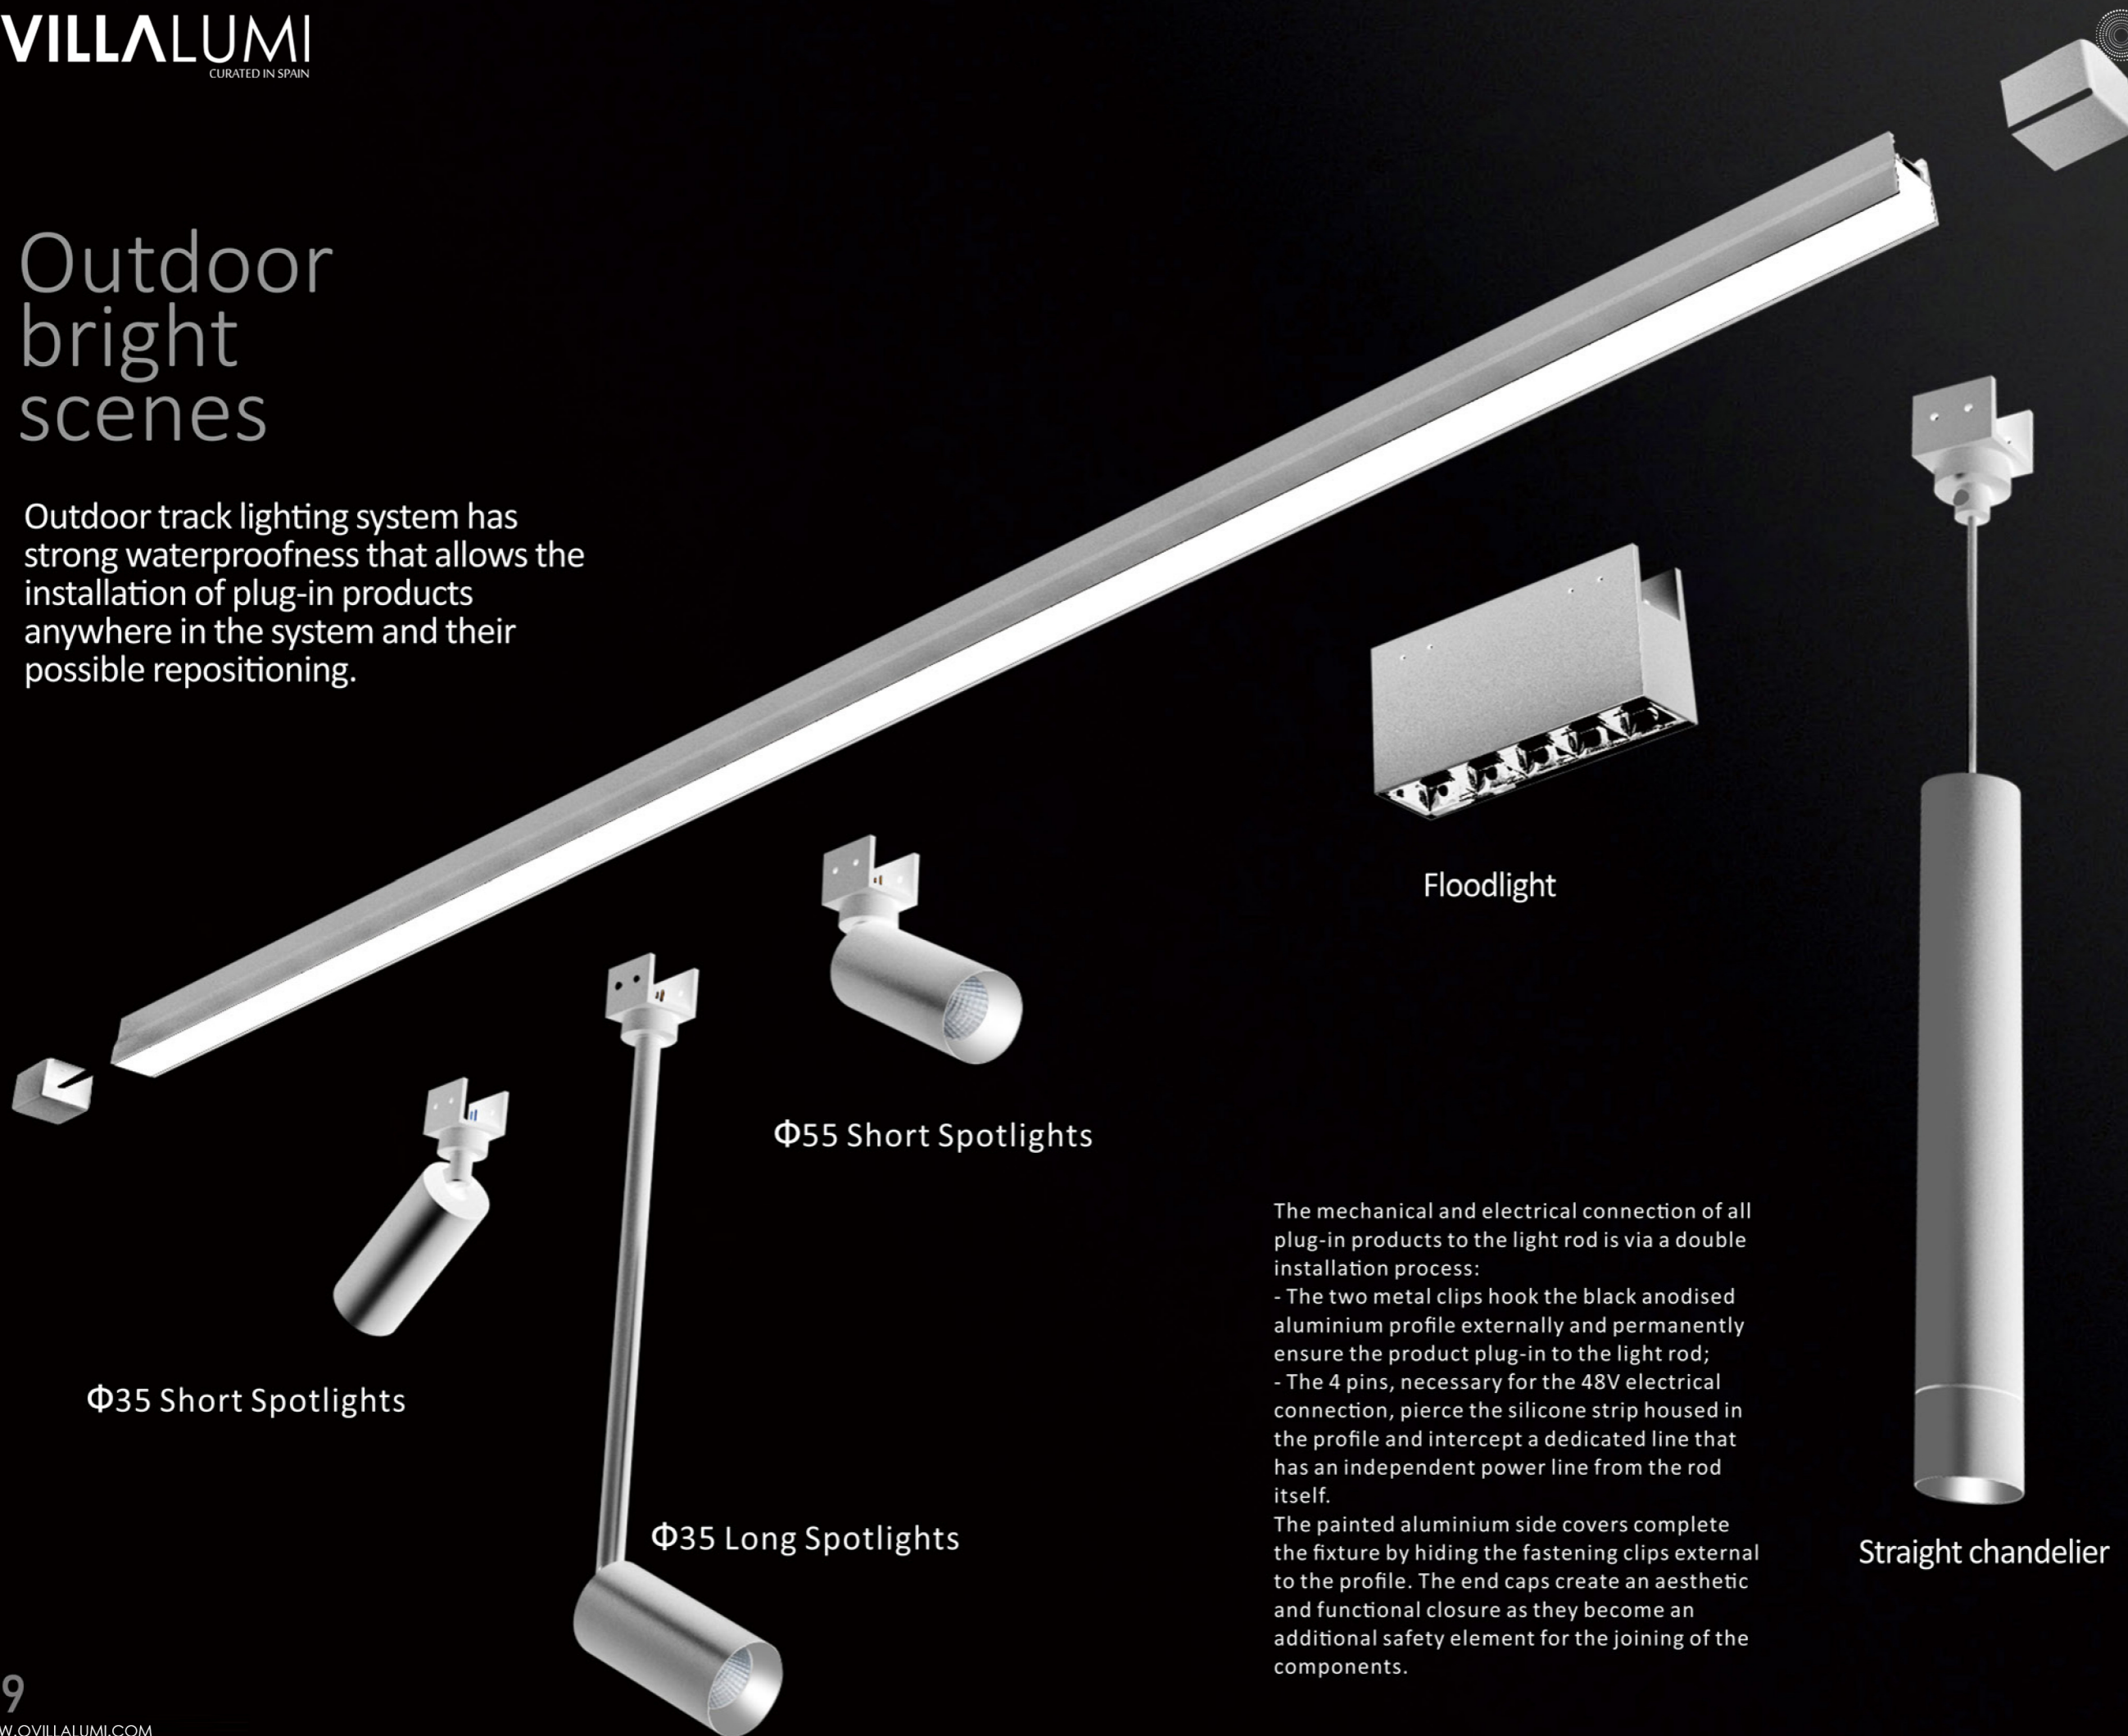

Floodlight

Φ55 Short Spotlights

Φ35 Short Spotlights

Φ35 Long Spotlights

Straight chandelier

The mechanical and electrical connection of all plug-in products to the light rod is via a double installation process:

- The two metal clips hook the black anodised aluminium profile externally and permanently ensure the product plug-in to the light rod;
- The 4 pins, necessary for the 48V electrical connection, pierce the silicone strip housed in the profile and intercept a dedicated line that has an independent power line from the rod itself.

The painted aluminium side covers complete the fixture by hiding the fastening clips external to the profile. The end caps create an aesthetic and functional closure as they become an additional safety element for the joining of the components.




Grille lamp

Straight chandelier

Φ35 Short Spotlights

Φ55 Short Spotlights

Φ35 Long Spotlights

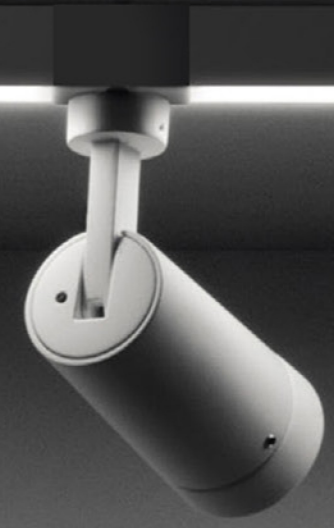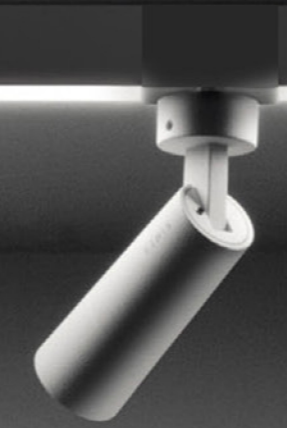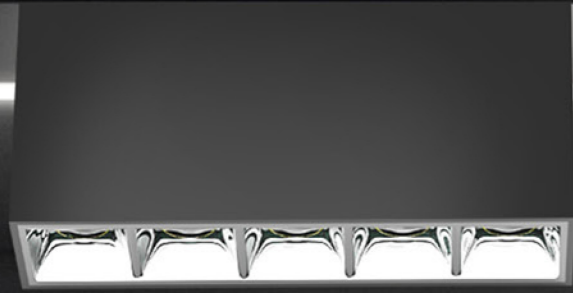

Diffuse and
accent light in a
single solution

The continuous and diffuse light effect of Highlighter, combined with a complete range of fixed and directional luminaires, offers a wide range of lighting possibilities.

While the Highlighter light rod illuminates evenly and widely, creating a light base that can meet more functional requirements, plug-in luminaires can add light accents to the desired spots and can be distinguished in different types.

On the left page the downlights Ceiling plug-in and Trendy plug-in have fixed and comfortable optics and direct their beam exclusively downwards. They differ in aesthetics and power but perform the same function. On the right page we find the spotlight with adjustable optics of the Outdoor track spotlights plug-in family. Specifically, Φ35 track spotlights, Φ35 track long spotlights and Φ55 track spotlights with arm, can tilt the beam in any direction, ideal for accent lighting producing defined and emotional effects.





Highlighter
Outdoor track

Highlighter is a light rod of 1, 2 or 3m in length composed of an LED source in opal silicone and a thin black anodized aluminium profile easily fixable to ceiling or wall. Inside the silicone strip are two independent power lines, one to feed the lighting rod and the other to feed the plug-in accessories.

Grille lamp
Linear downlight with fix optic

Grille lamp is a linear downlight that thanks to its rearward optics, guarantees a total absence of glare and an excellent distribution of the beam on the ground. The glass is properly interposed between the internal reflectors and the external cowls for even more professional visual comfort. Available with 4 LEDs, Grille lamp plug-in is ideal for illuminating double height spaces or where a good even horizontal illumination is required.

Straight chandelier
Straight chandelier

Floodlight plug-in is a downlight with fixed comfortable optics consisting of 3 lenses and its cowls. Despite its reduced dimensions, it ensures excellent levels of lighting and visual comfort.

Φ35 Short Spotlights
Adjustable angle spotlights

Φ35 Short Spotlights plug-in is a microprojector with comfortable directional optics engineered. It offers high lighting performance while maintaining minimum dimensions. It's available with fixed optic 15° narrow beam, or with fixed optics 45° medium beam.

Φ35 Long Spotlights
Adjustable angle spotlights

Φ35 Long Spotlights plug-in has the same lighting characteristics of Φ35 Long Spotlights but with the addition of an arm that allows to easily reach even the most complex subjects.

Φ55 Short Spotlights
Adjustable angle spotlights

Φ55 Short Spotlights plug-in is a microprojector with comfortable directional optics engineered. It offers high lighting performance while maintaining minimum dimensions. It's available with fixed optic 15° narrow beam, or with fixed optics 45° medium beam.





Colors:



- .01 White
- .09 black

IP rating
IP65

IP rating
CLASS III


Remote power supply 48V DC not included.

HIGHLIGHTER
HIGHLIGHTER

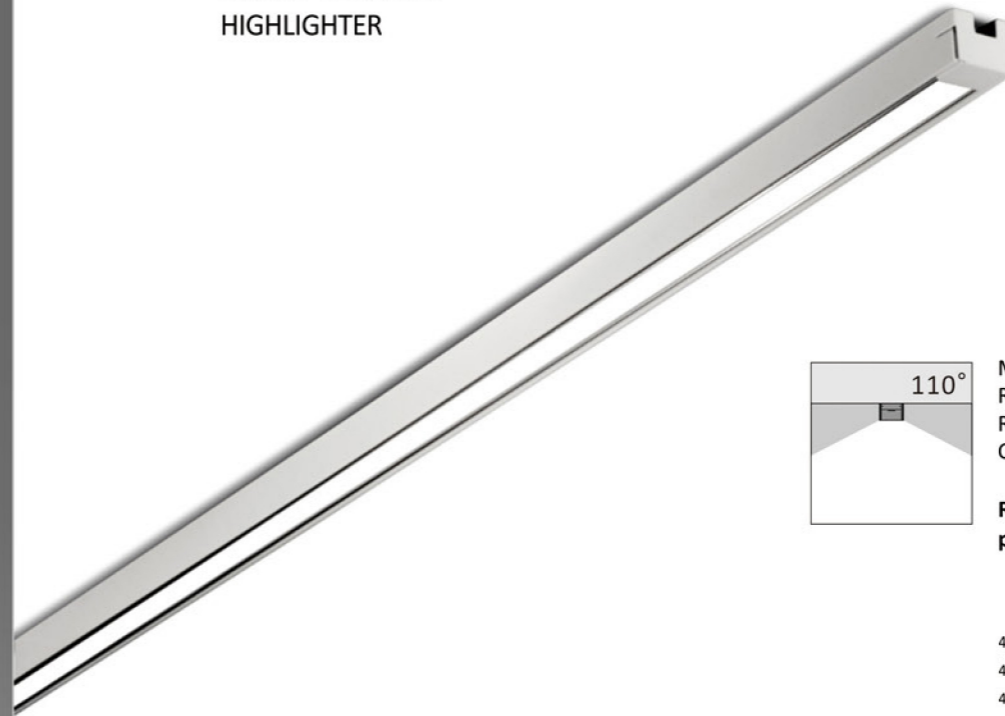


MID-POWER LED 3000K CRI90 650lm / 1m
Rated luminaire luminous flux 650lm / 1m
Rated input power 10W / 1m **48V DC**
Computer-simulated photometrics


Requires constant voltage remote power supply 48V DC

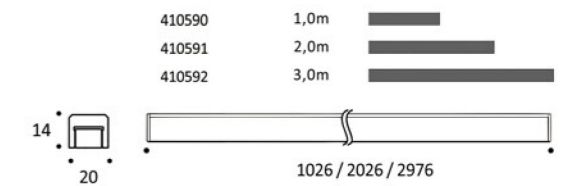

Straight chandelier plug-in
Straight chandelier



410578
3 HIGH-POWER LED 3000K CRI90 540lm
Rated luminaire luminous flux 355lm
Rated input power 8,0W 48V DC
Computer-simulated photometrics





410578
3 HIGH-POWER LED 3000K CRI90 540lm
Rated luminaire luminous flux 355lm
Rated input power 8,0W 48V DC
Computer-simulated photometrics


Constant voltage 48V DC from the electrical connection to the HIGHLIGHTER lighting profile.

Φ35 Short Spotlights


Adjustable plug-in Spotlights with fixed optic

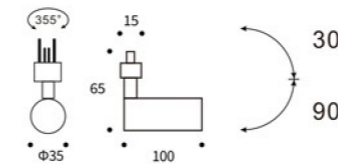

410579
3 HIGH-POWER LED **3000K** CRI90 450lm
Rated luminaire luminous flux 355lm
Rated input power 9W **48V DC**
Computer-simulated photometrics



410579
3 HIGH-POWER LED **3000K** CRI90 450lm
Rated luminaire luminous flux 355lm
Rated input power 9W **48V DC**
Computer-simulated photometrics






Different beam angle can be selected for spotlight: 15°, 24°, 38°, 50°
Select light source and lamps scientifically and reasonably.
Create an ideal environment and space atmosphere.


Constant voltage 48V DC from the electrical connection to the HIGHLIGHTER lighting profile.

Φ35 Long Spotlights


Adjustable plug-in Spotlights with fixed optic

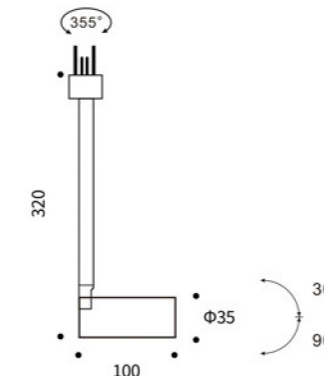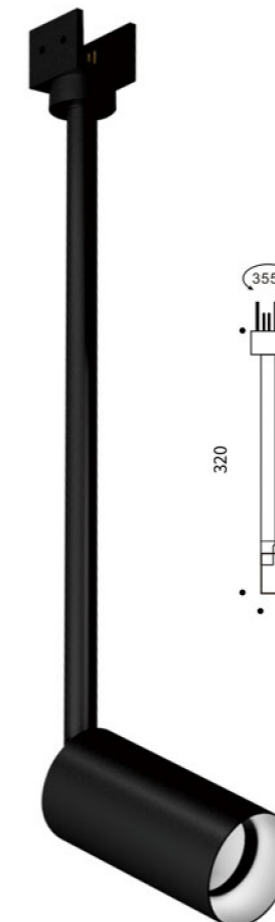

410580
3 HIGH-POWER LED **3000K** CRI90 540lm
Rated luminaire luminous flux 355lm
Rated input power 8W **48V DC**
Computer-simulated photometrics



410580
3 HIGH-POWER LED **3000K** CRI90 540lm
Rated luminaire luminous flux 355lm
Rated input power 8W **48V DC**
Computer-simulated photometrics





Different beam angle can be selected for spotlight: 15°, 24°, 38°, 50°
Select light source and lamps scientifically and reasonably.
Create an ideal environment and space atmosphere.

Constant voltage 48V DC from the electrical connection to the HIGHLIGHTER lighting profile.




5 Heads Grille Lamp


Adjustable plug-in Spotlights with fixed optic

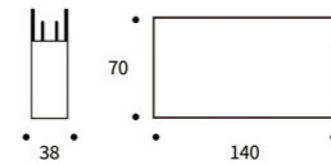

410582
5 HIGH-POWER LED 3000K CRI90 700lm
Rated luminaire luminous flux 700lm
Rated input power 10W 48V DC
Computer-simulated photometrics



410582
5 HIGH-POWER LED 3000K CRI90 700lm
Rated luminaire luminous flux 700lm
Rated input power 10W 48V DC
Computer-simulated photometrics





410582
5 HIGH-POWER LED 3000K CRI90 700lm
Rated luminaire luminous flux 700lm
Rated input power 10W 48V DC
Computer-simulated photometrics


Constant voltage 48V DC from the electrical connection to the HIGHLIGHTER lighting profile.

10 Heads Grille Lamp


Adjustable plug-in Spotlights with fixed optic

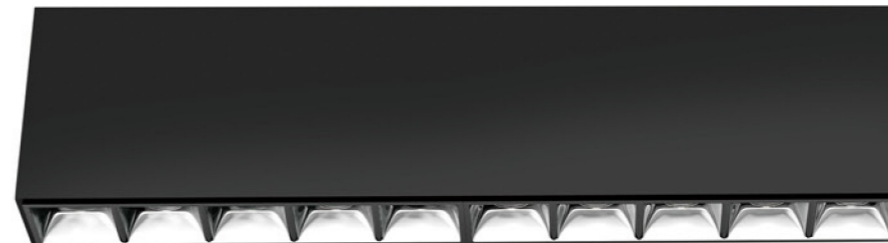

410583
5 HIGH-POWER LED 3000K CRI90 700lm
Rated luminaire luminous flux 700lm
Rated input power 10W 48V DC
Computer-simulated photometrics



410583
5 HIGH-POWER LED 3000K CRI90 700lm
Rated luminaire luminous flux 700lm
Rated input power 10W 48V DC
Computer-simulated photometrics



410583
5 HIGH-POWER LED 3000K CRI90 700lm
Rated luminaire luminous flux 700lm
Rated input power 10W 48V DC
Computer-simulated photometrics


Constant voltage 48V DC from the electrical connection to the HIGHLIGHTER lighting profile.



32
SCHNEIDER




FASE 1 Installation method of track
PHASE 1 Installation method of track

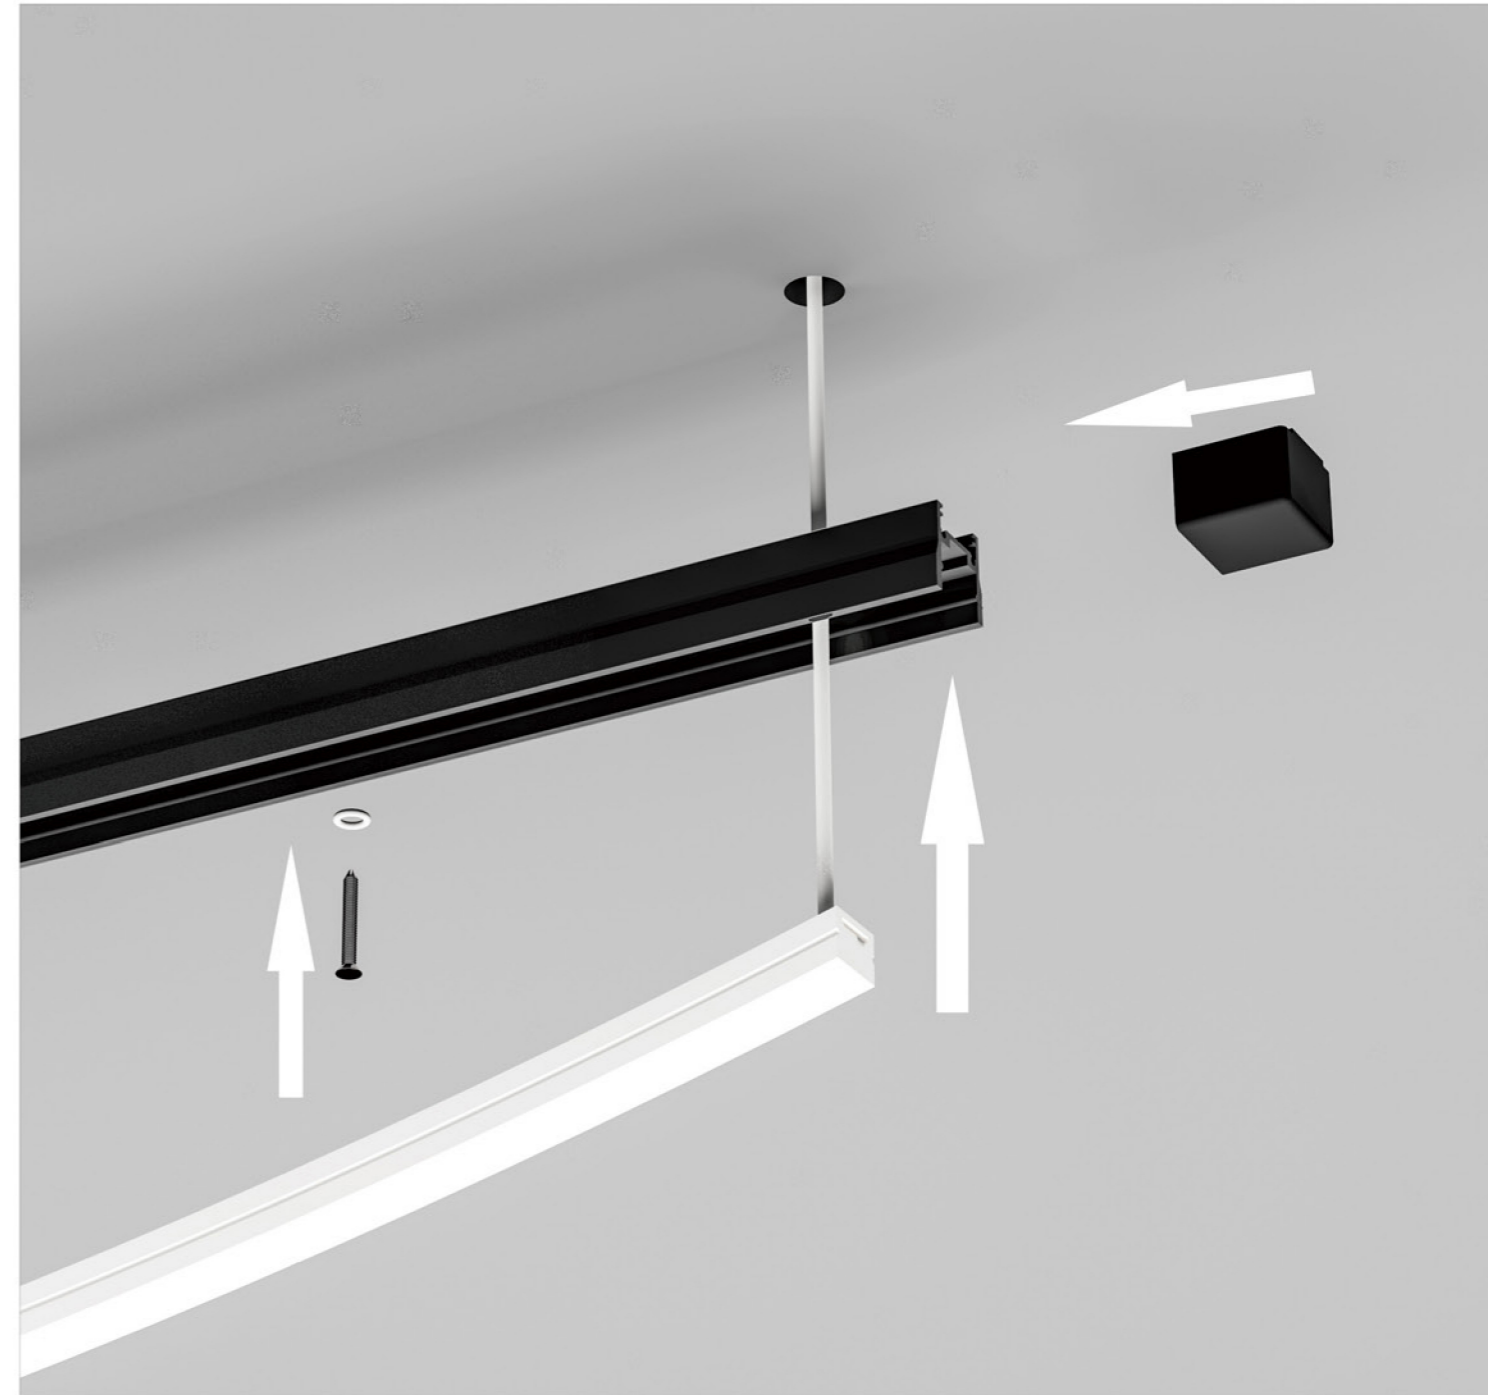

FASE 2 Method of installing highlight belt
PHASE 2 Method of installing highlight belt



FASE 1 The two tracks join together in a straight line
PHASE 1 The two tracks join together in a straight line

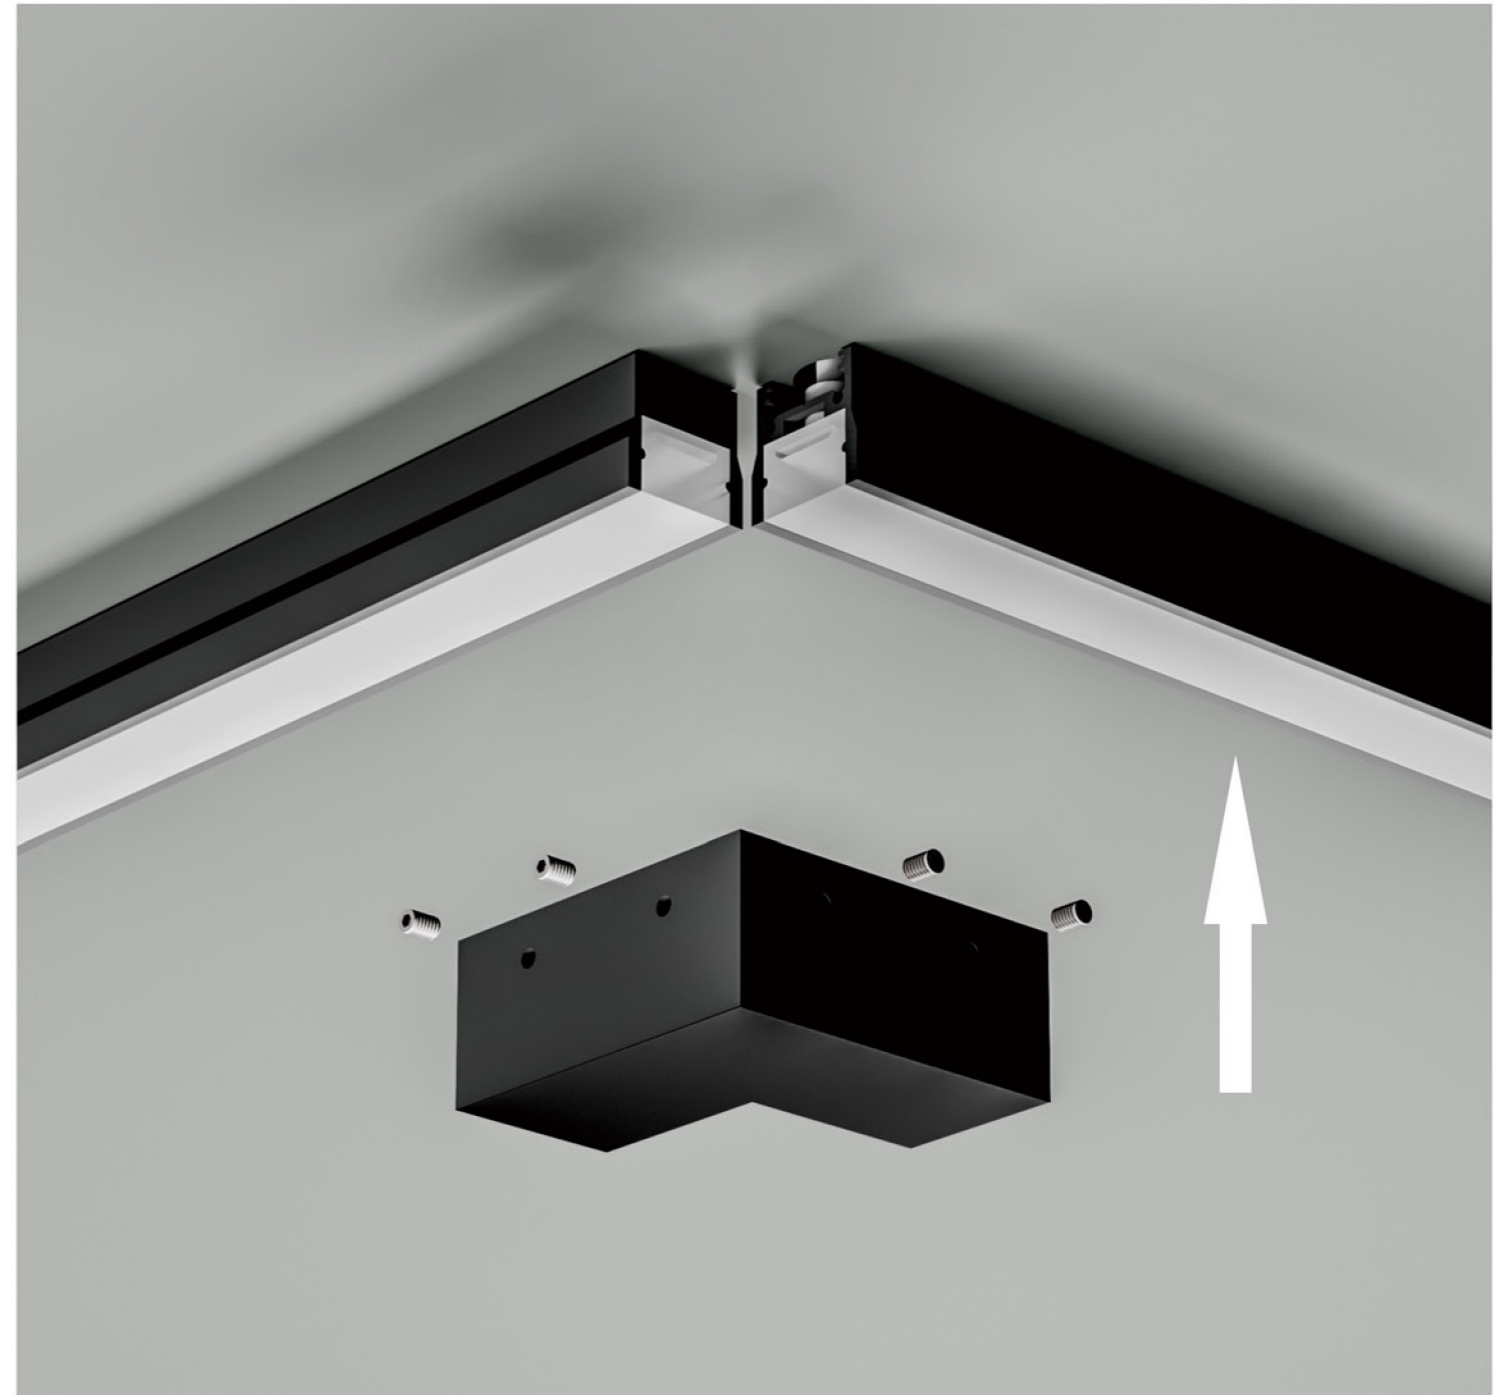


FASE 2 The two tracks are joined together at a 90° Angle
PHASE 2 The two tracks are joined together at a 90° Angle

With the track in place, install the pins and connection holders to lock the hex screws



FASE 1 Install e riposizionamento prodotto plug-in
PHASE 1 Retrait et repositionnement de produit enfichable

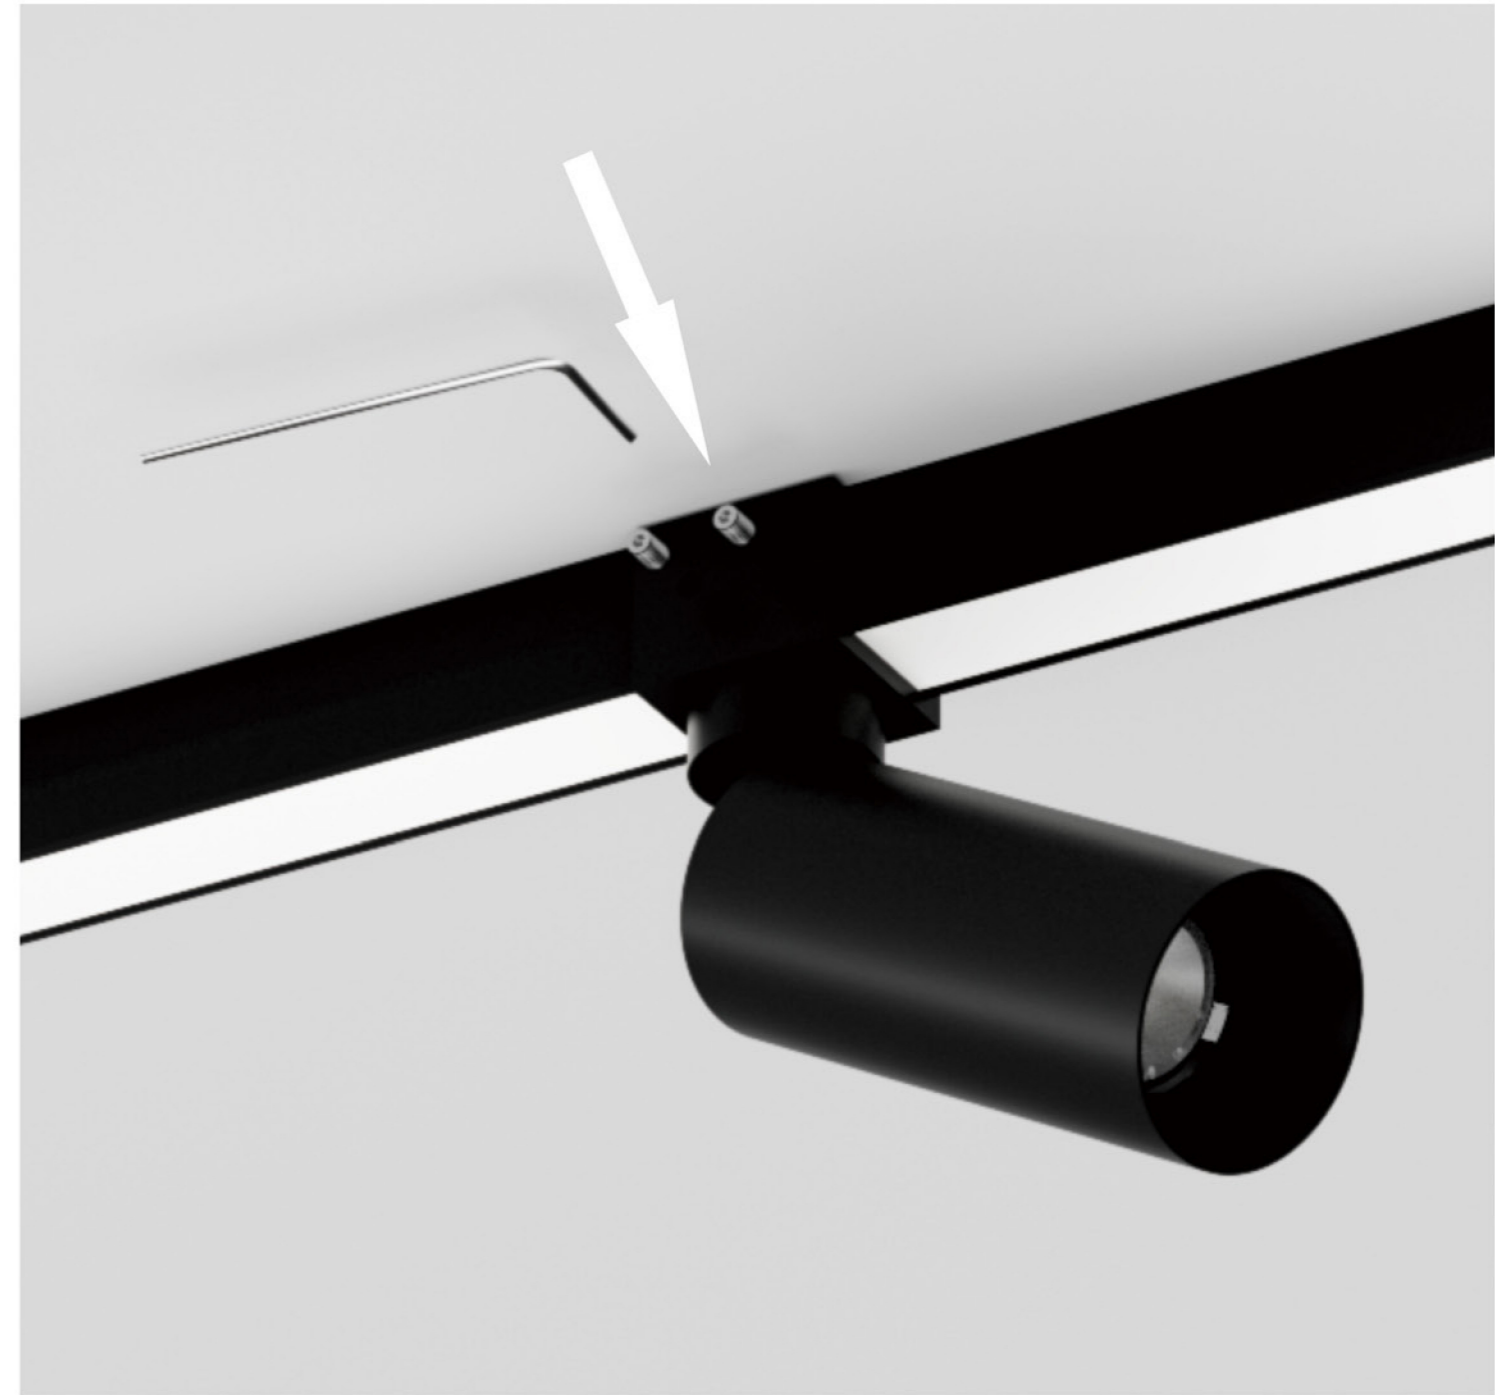

FASE 2 Installazione prodotto plug-in
PHASE 2 Installation de produit enfichable


loosen the adjustment grub screw located on the product with an allen key, direct the product where you like and finally tighten the grub screw to fix the product in position.

Outdoor Lawn Luminaire

IP65




Φ158

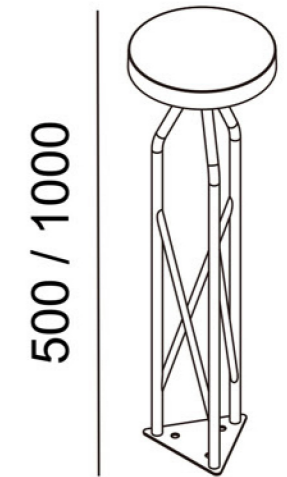

Colors:




Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610131	12W	LED	3000k/4000k	1000	DC 24V	bridgelux	720/760lm
610142	12W	LED	3000k/4000k	500	DC 24V	bridgelux	720/760lm

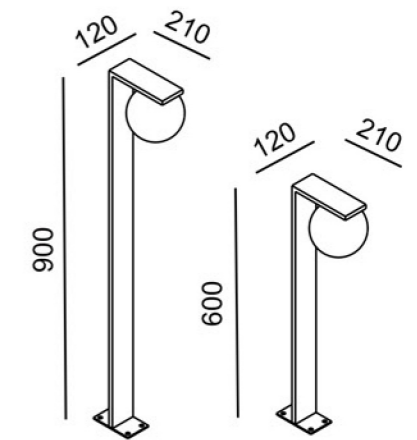

Colors:



Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610121	9W	LED	3000k/4000k	600	DC 24V	GS	540/580lm
610122	9W	LED	3000k/4000k	900	DC 24V	GS	540/580lm


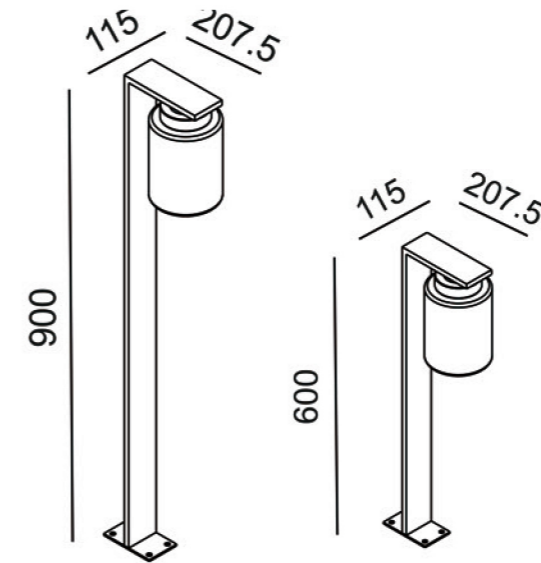


CE ROHS IP65 ☀️ 🏠 ⌚ CRI:90

Colors:
 Sand coffee
 Sand grey
 Sand black
 Sand white

Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610124	12W	LED	3000k/4000k	600	DC 24V	bridgelux	720/760lm
610126	12W	LED	3000k/4000k	900	DC 24V	bridgelux	720/760lm



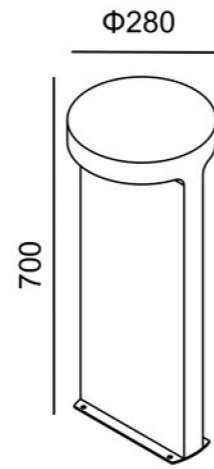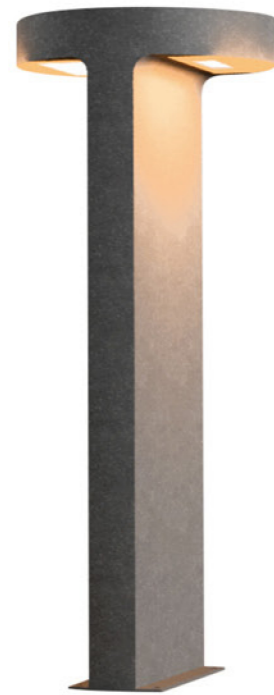


- Grey Smooth Cement
- White Sandstone Cement

Colors:



Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
610133	2x8W	LED	3000k	90	220-240v	bridgelux	760lm
			4000k				800lm

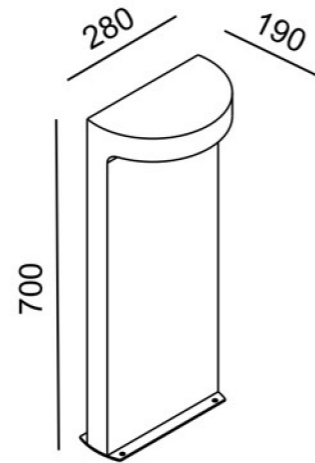


- Grey Smooth Cement
- White Sandstone Cement

Colors:



Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
610132	8W	LED	3000k	90	220-240v	bridgelux	380lm
			4000k				420lm




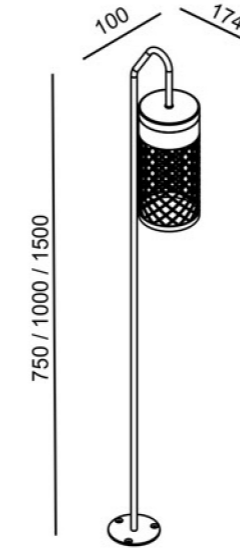

CE ROHS IP65 CRI:90

Colors: Sand coffee Sand grey
 Sand black Sand white


Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610148	12W	LED	3000k/4000k	700	DC 24V	GS	720/760lm
610147	12W	LED	3000k/4000k	1000	DC 24V	GS	720/760lm
610136	12W	LED	3000k/4000k	1500	DC 24V	GS	720/760lm

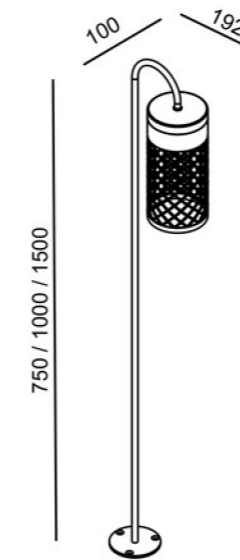


CE ROHS IP65 CRI:90

Colors: Sand coffee Sand grey
 Sand black Sand white


Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610150	12W	LED	3000k/4000k	700	DC 24V	GS	720/760lm
610149	12W	LED	3000k/4000k	1000	DC 24V	GS	720/760lm
610137	12W	LED	3000k/4000k	1500	DC 24V	GS	720/760lm

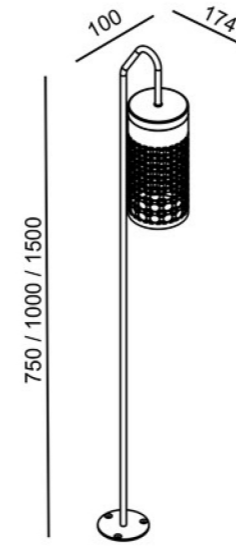

Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610144	12W	LED	3000k/4000k	700	DC 24V	GS	720/760lm
610143	12W	LED	3000k/4000k	1000	DC 24V	GS	720/760lm
610134	12W	LED	3000k/4000k	1500	DC 24V	GS	720/760lm

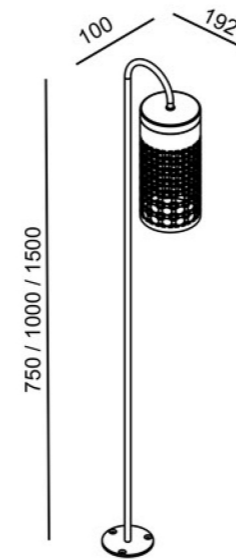


Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610146	12W	LED	3000k/4000k	700	DC 24V	GS	720/760lm
610145	12W	LED	3000k/4000k	1000	DC 24V	GS	720/760lm
610135	12W	LED	3000k/4000k	1500	DC 24V	GS	720/760lm

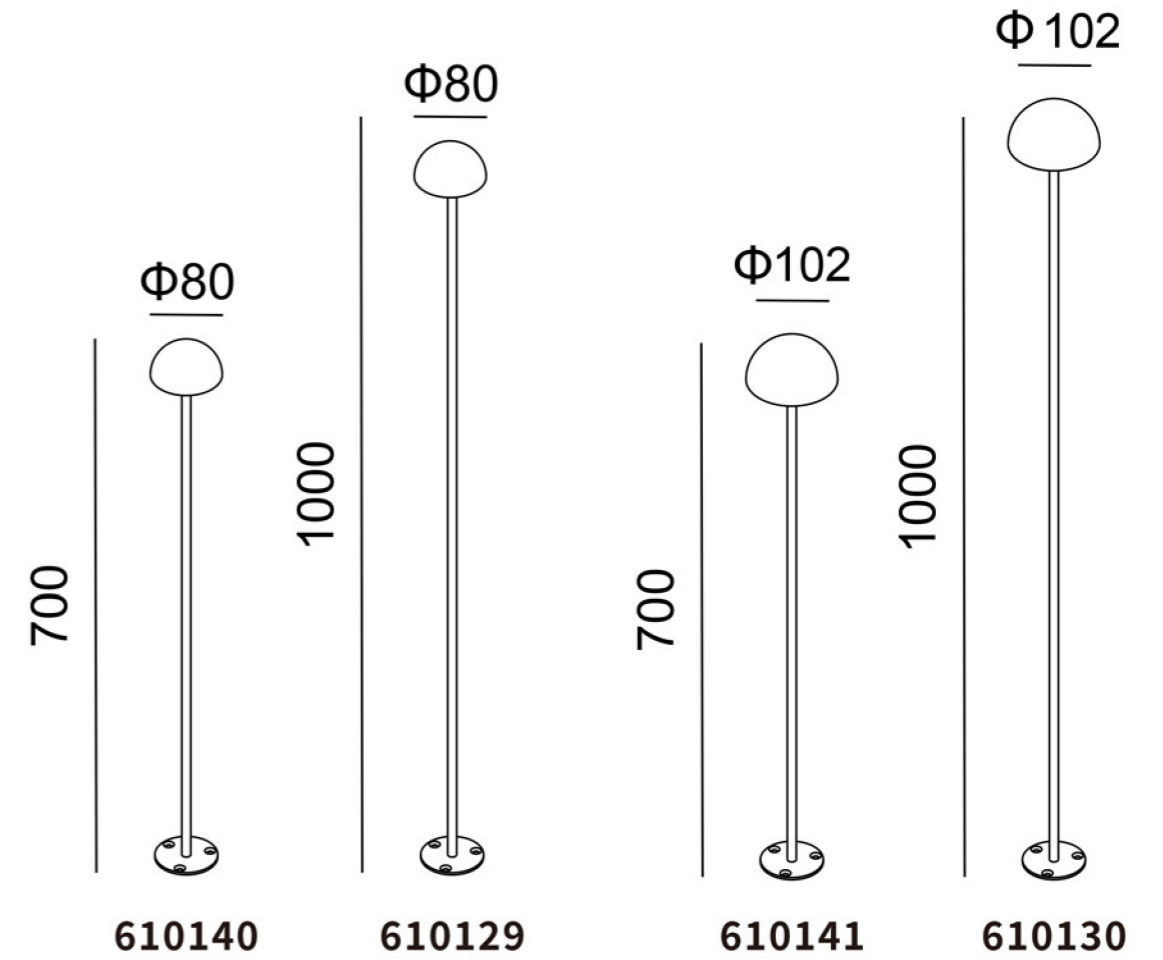


CE ROHS IP65 CRI:90

Colors: Sand coffee Sand grey
 Sand black Sand white


Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610129	6W	LED	3000k/4000k	1000	DC 24V	bridgelux	380/420lm
610140	6W	LED	3000k/4000k	700	DC 24V	bridgelux	380/420lm
610130	8W	LED	3000k/4000k	1000	DC 24V	bridgelux	380/420lm
610141	8W	LED	3000k/4000k	700	DC 24V	bridgelux	380/420lm

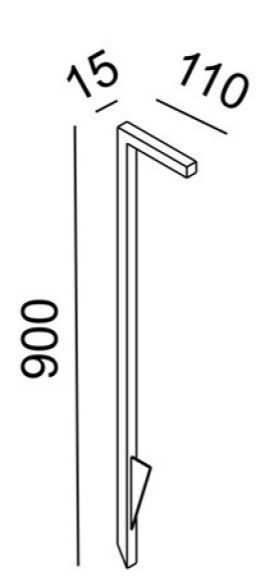


610127

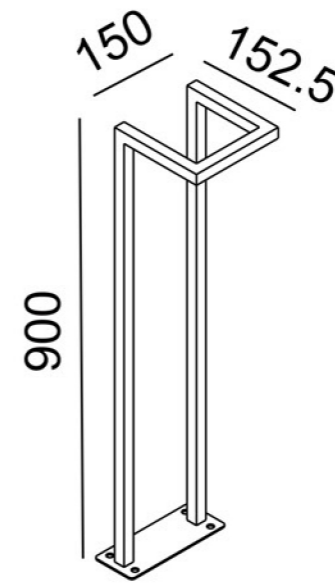

610128

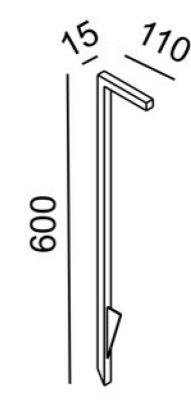


610138

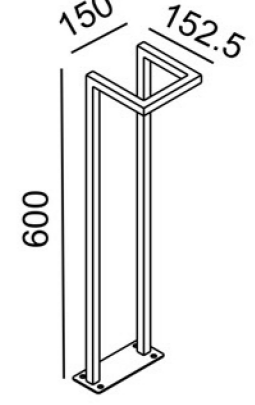

610139


Colors:
 Sand coffee
 Sand grey
 Sand black
 Sand white

Item No.	Power	lamp	Color Temperature	Height	Voltage	LED	Lumen
610127	4W	LED	3000k/4000k	900	DC 24V	bridgelux	200/240lm
610128	12W	LED	3000k/4000k	900	DC 24V	bridgelux	600/640lm
610138	4W	LED	3000k/4000k	600	DC 24V	bridgelux	200/240lm
610139	12W	LED	3000k/4000k	600	DC 24V	bridgelux	600/640lm

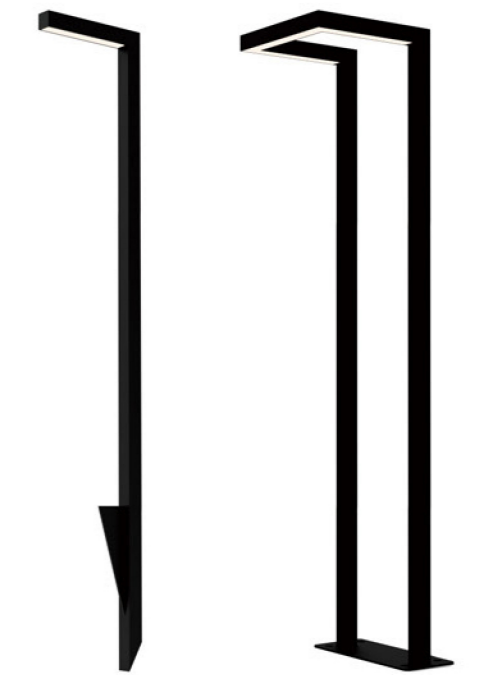

Chandelier Series

IP20

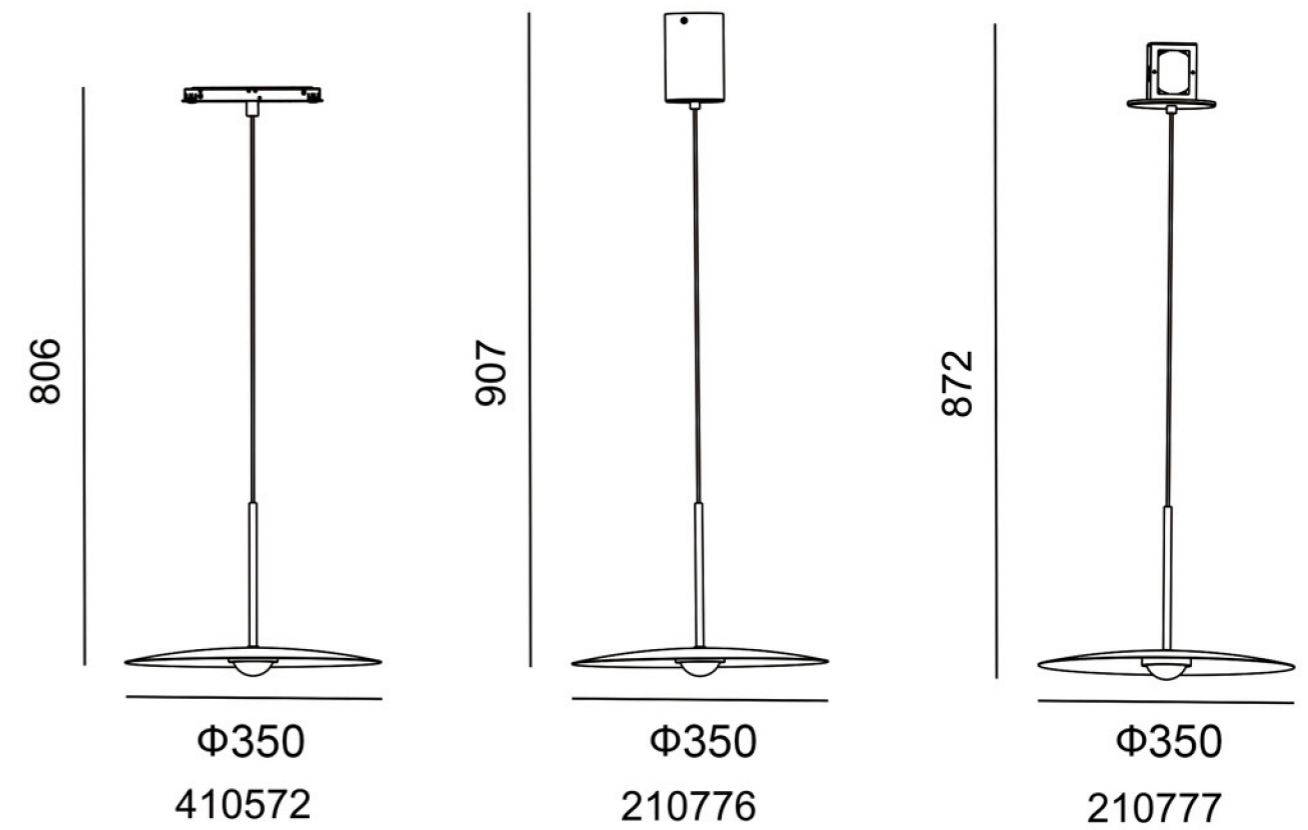

Colors: Sand black Sand white

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
410572	8W	LED	3000k/4000k	90	DC 48V	bridgelux	600/640lm
210776	8W	LED	3000k/4000k	90	220-240v	bridgelux	600/640lm
210777	8W	LED	3000k/4000k	90	220-240v	bridgelux	600/640lm

Surface mounted




Recessed



Track adapter




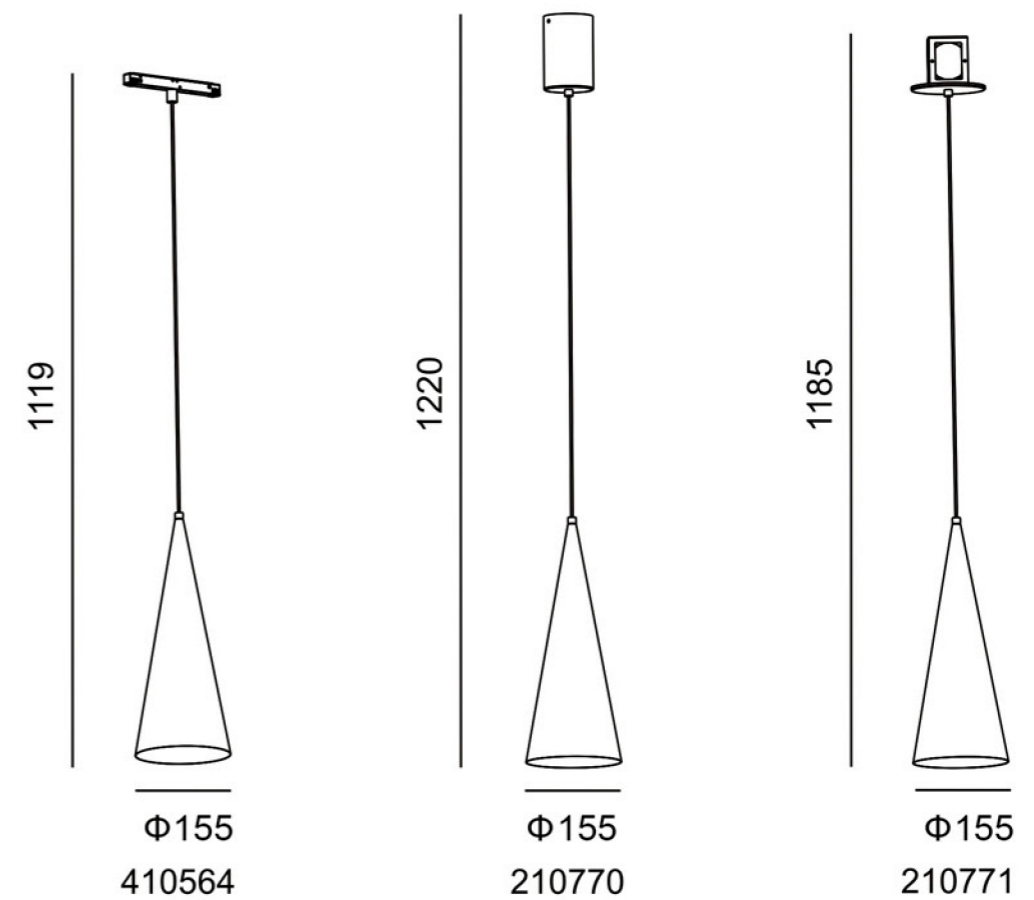

Colors:
 Sand black
 Sand white


Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
410564	12W	LED	3000k/4000k	90	DC 48V	bridgelux	480/520lm
210770	12W	LED	3000k/4000k	90	220-240v	bridgelux	480/520lm
210771	12W	LED	3000k/4000k	90	220-240v	bridgelux	480/520lm




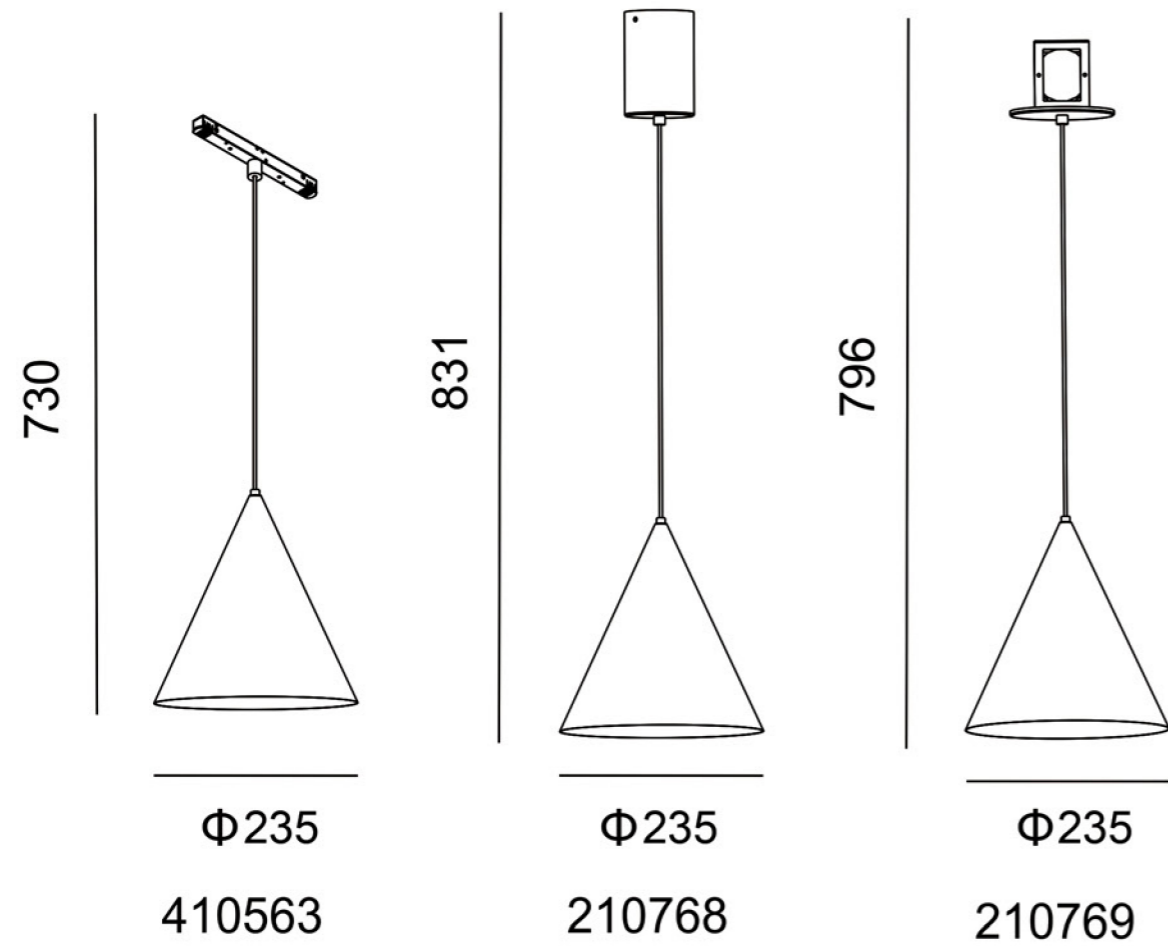

Colors: Sand black Sand white


Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
410563	12W	LED	3000k/4000k	90	DC 48V	bridgelux	480/520lm
210768	12W	LED	3000k/4000k	90	220-240v	bridgelux	480/520lm
210769	12W	LED	3000k/4000k	90	220-240v	bridgelux	480/520lm

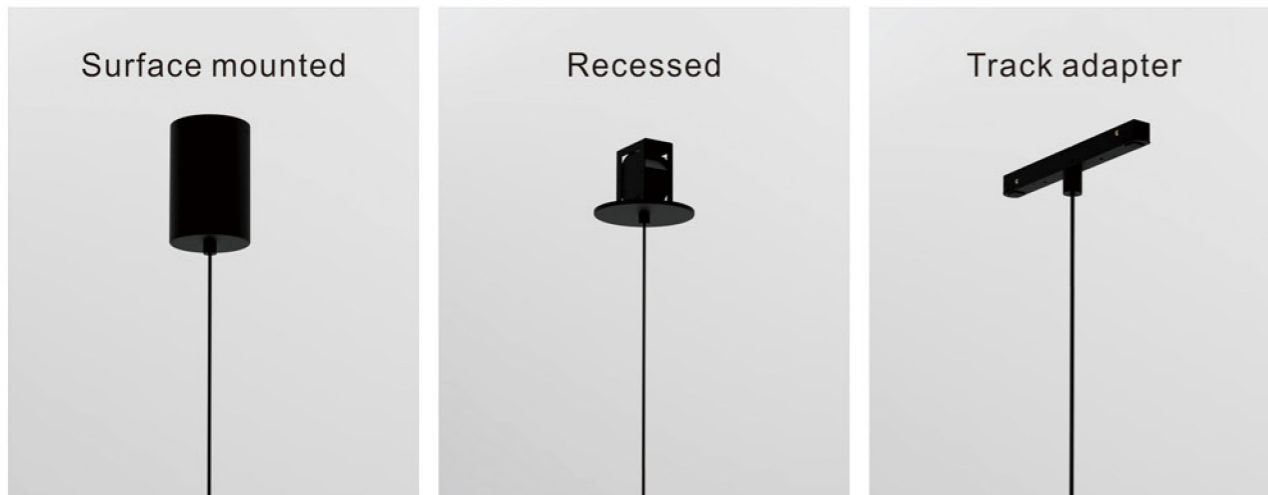


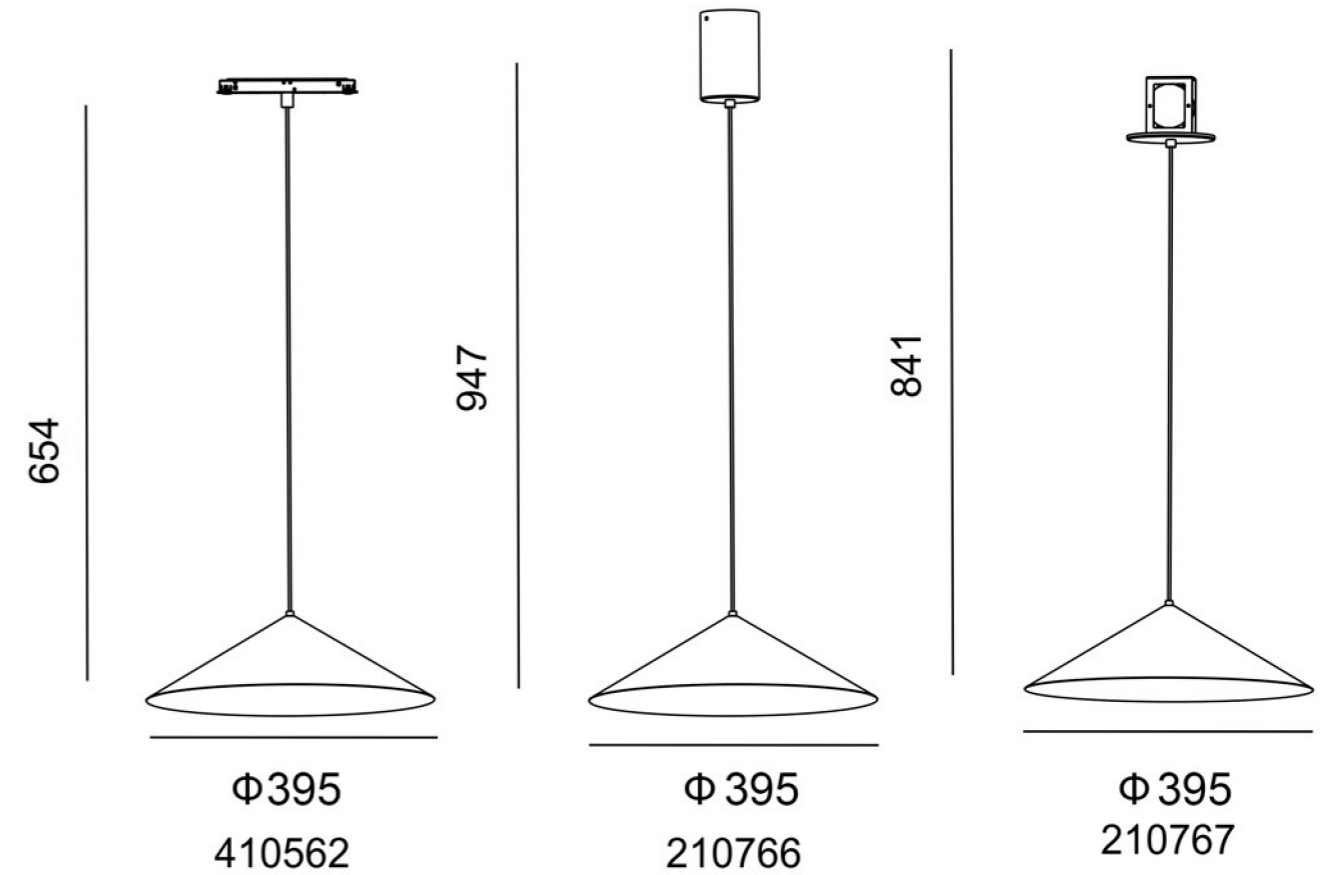

Colors:  Sand black  Sand white


Item No.	Power	Lamp	Color Temperature	CRI	Voltage	LED	Lumen
410562	12W	LED	3000k/4000k	90	DC 48V	bridgelux	480/520lm
210766	12W	LED	3000k/4000k	90	220-240v	bridgelux	480/520lm
210767	12W	LED	3000k/4000k	90	220-240v	bridgelux	480/520lm

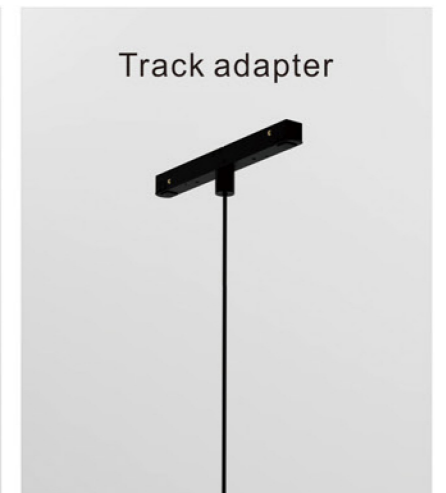

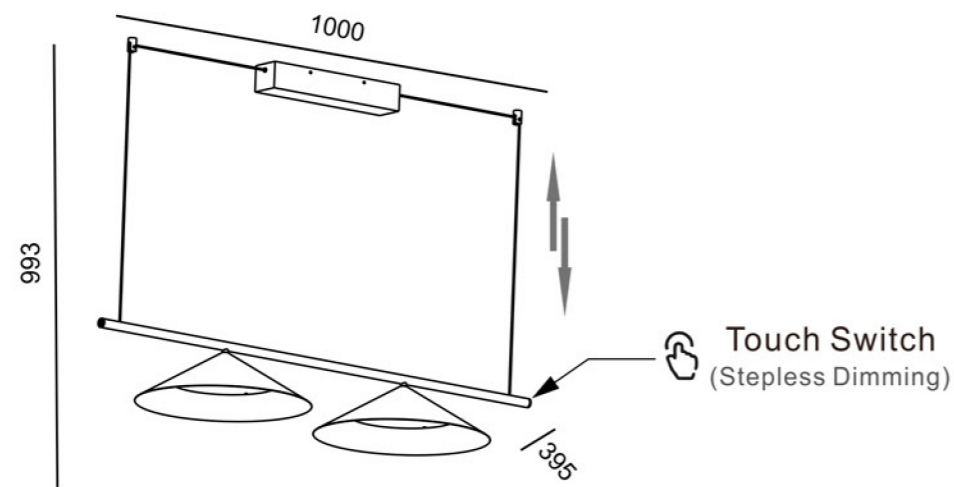

Colors: Sand black Sand white

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
210778	24W	LED	3000k	90	220-240v	bridgelux	960lm
			4000k				1000lm

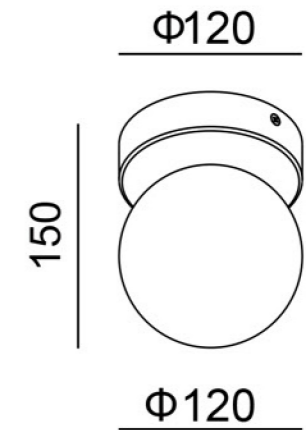


210763



Colors: Sand black Sand white

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
210763	8W	LED	3000k	90	220-240v	bridgelux	480lm
			4000k				520lm

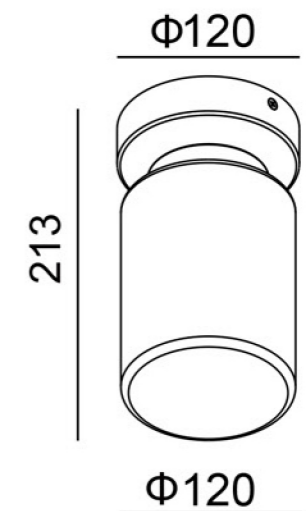


210765




Colors: Sand black Sand white

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
210765	8W	LED	3000k	90	220-240v	bridgelux	480lm
			4000k				520lm

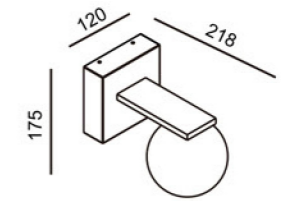



Colors: Sand coffee Sand grey
 Sand black Sand white

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
310182	1x8W	LED	3000k	90	220-240v	bridgelux	480lm
			4000k				520lm

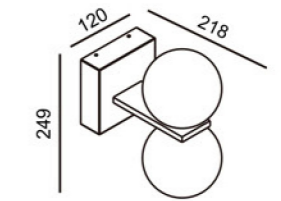



Colors: Sand coffee Sand grey
 Sand black Sand white

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
320183	2x8W	LED	3000k	90	220-240v	bridgelux	480lm
			4000k				520lm

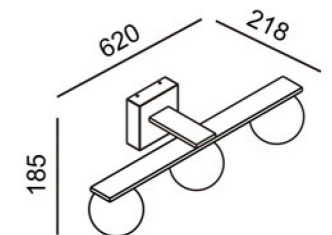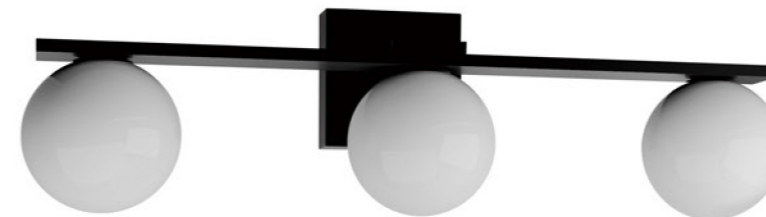


Colors: Sand coffee Sand grey
 Sand black Sand white


Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
330184	3x8W	LED	3000k	90	220-240v	bridgelux	480lm
			4000k				520lm

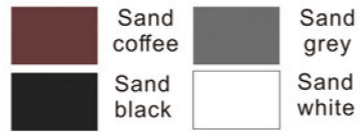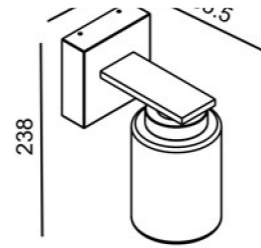

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
310186	1x8W	LED	3000k	90	220-240v	bridgelux	420lm
			4000k				460lm

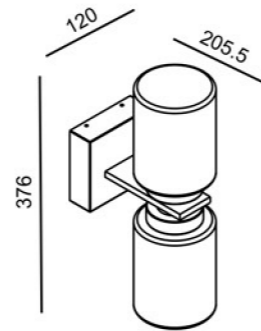

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
320188	2x8W	LED	3000k	90	220-240v	bridgelux	820lm
			4000k				860lm

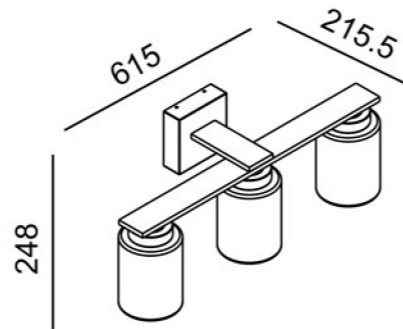

Item No.	Power	lamp	Color Temperature	CRI	Voltage	LED	Lumen
330190	3x8W	LED	3000k	90	220-240v	bridgelux	1220lm
			4000k				1260lm





VILLALUMI


CURATED IN SPAIN

Architectural Downlight



LIGHT

2025

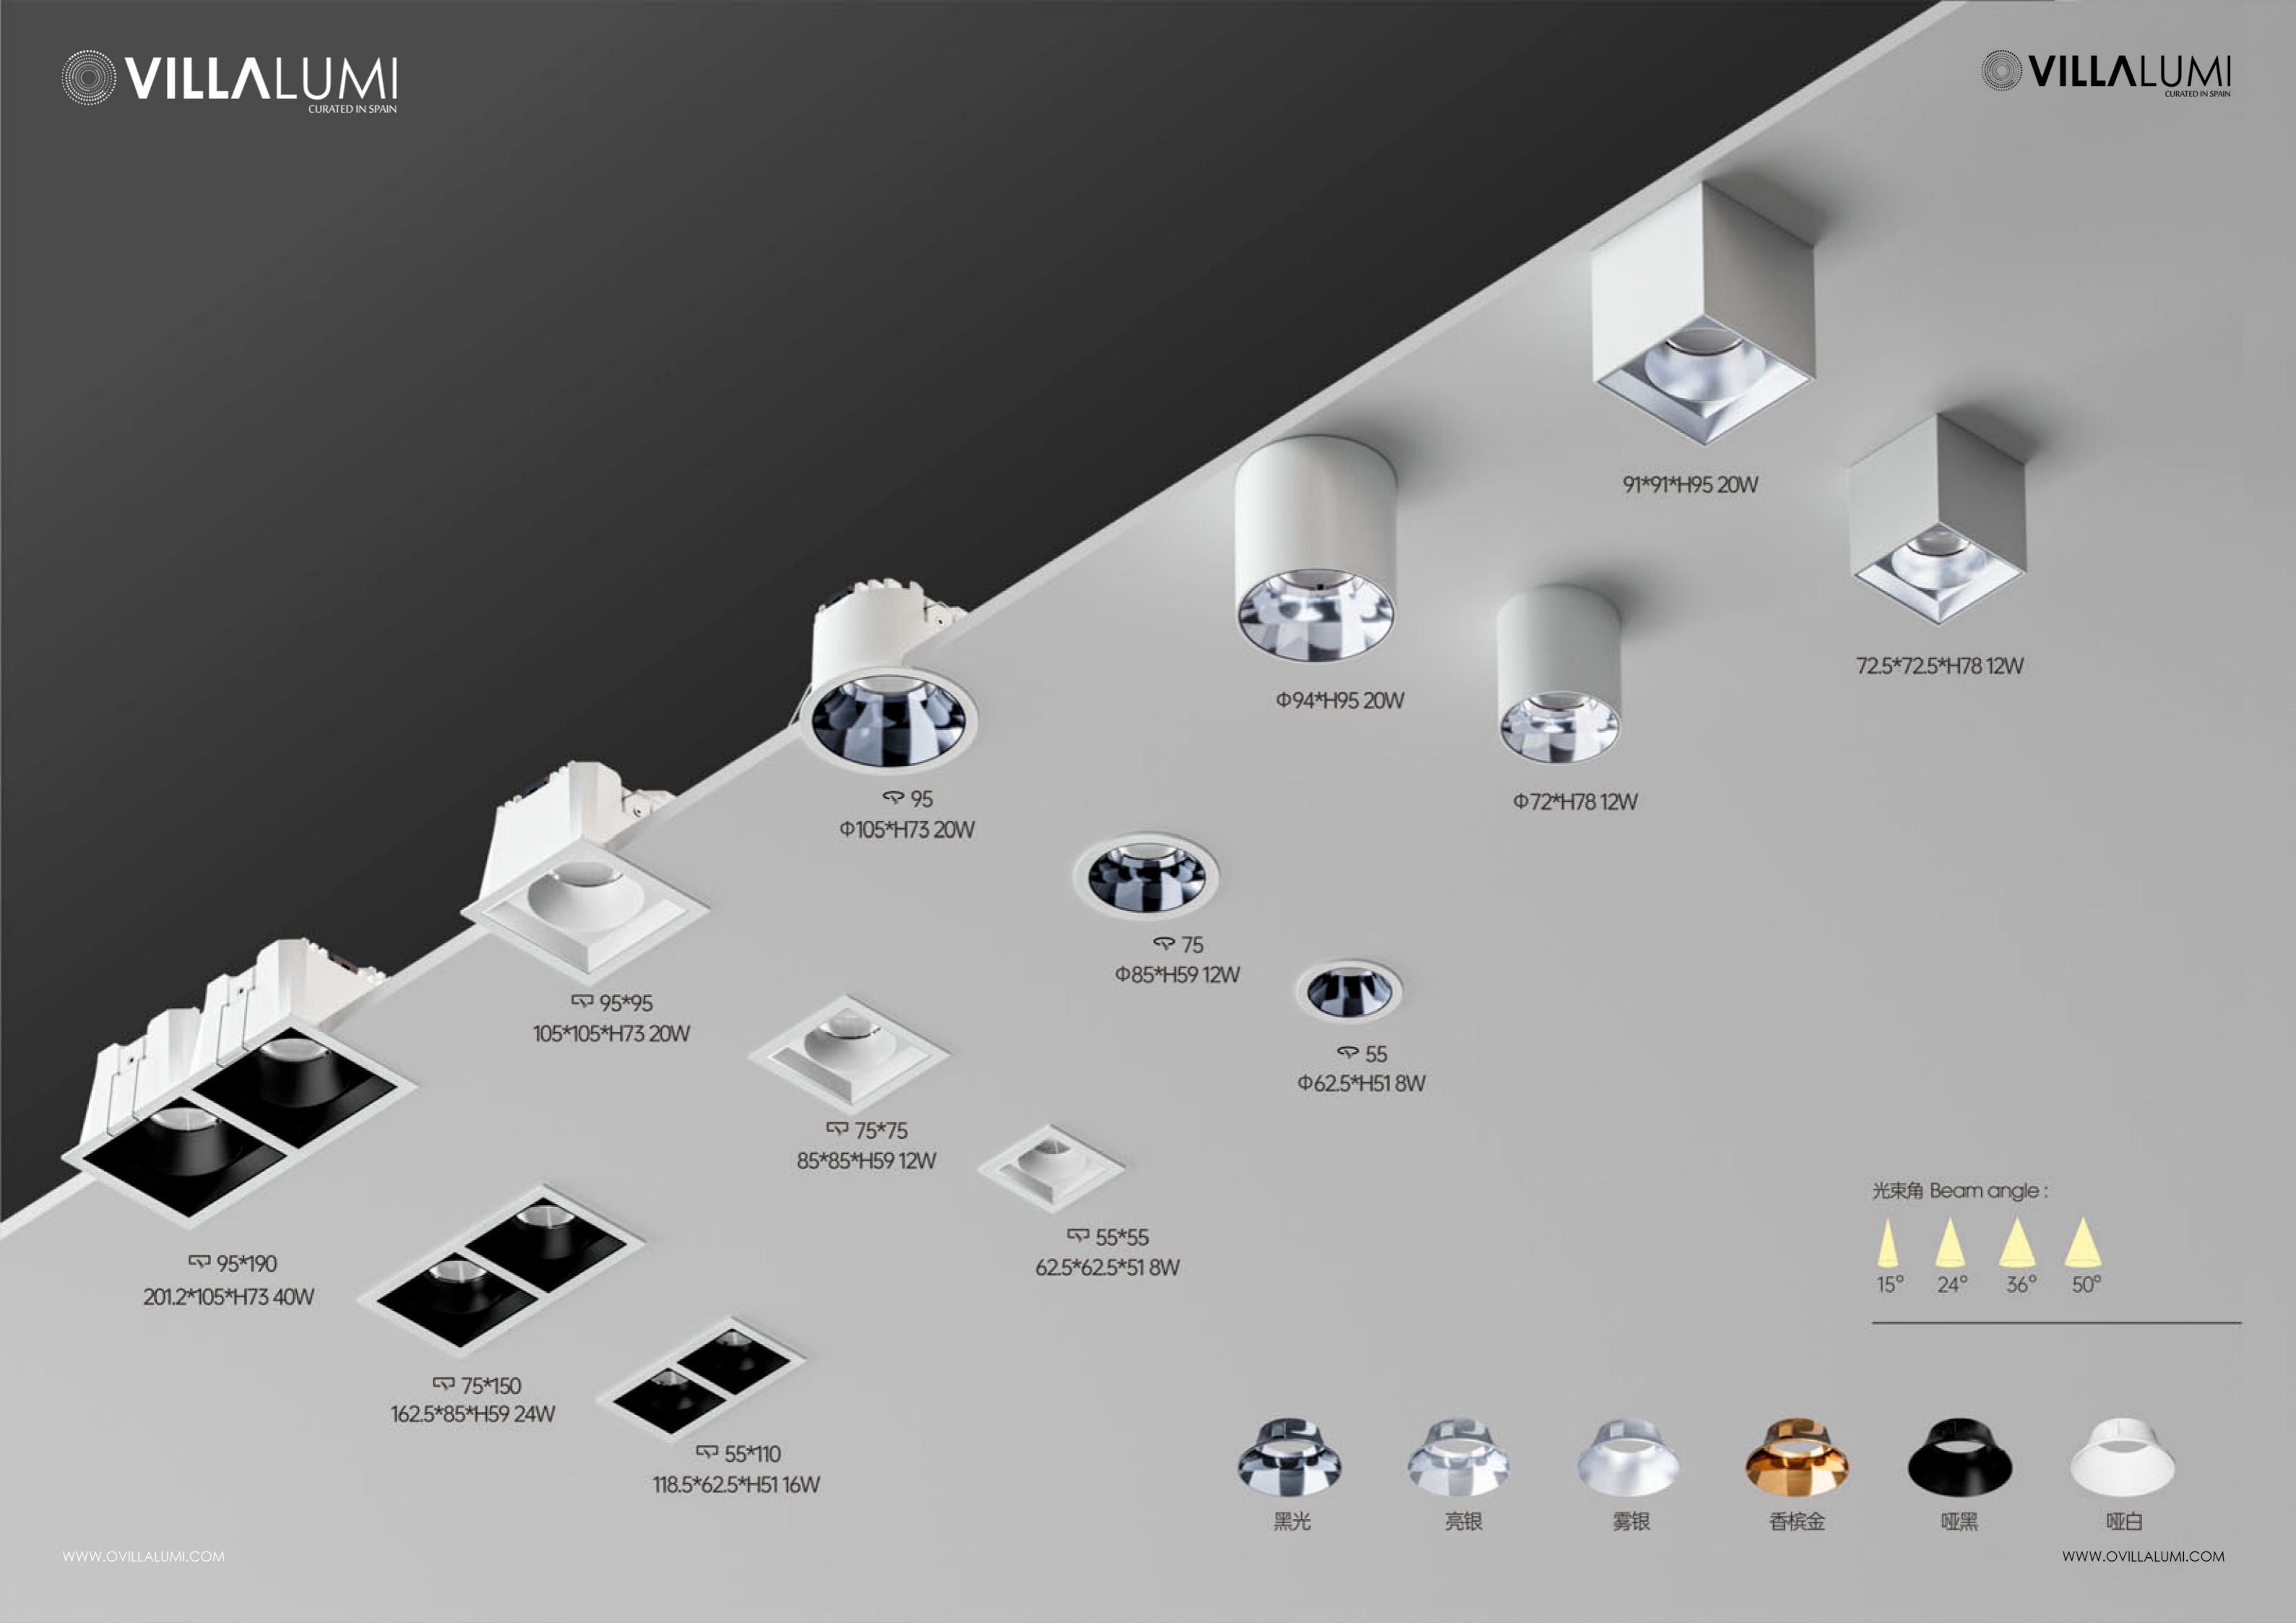

☞ 95*190
201.2*105*H73 40W

☞ 95*95
105*105*H73 20W

☞ 75*150
162.5*85*H59 24W

☞ 55*110
118.5*62.5*H51 16W

☞ 95
Φ105*H73 20W

☞ 75
Φ85*H59 12W

☞ 55
Φ62.5*H51 8W

☞ 75*75
85*85*H59 12W

☞ 55*55
62.5*62.5*H51 8W

Φ94*H95 20W

Φ72*H78 12W

91*91*H95 20W

72.5*72.5*H78 12W

光束角 Beam angle :



黑光



亮银



雾银





香槟金



哑黑





哑白

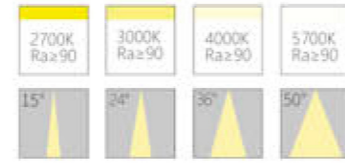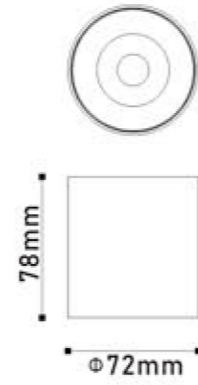

Colors:






Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110901	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

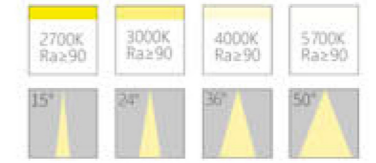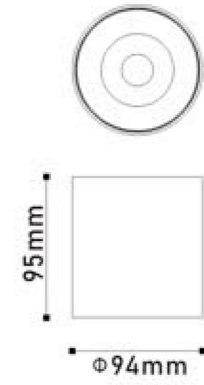

Colors:





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110903	20W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

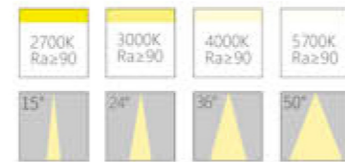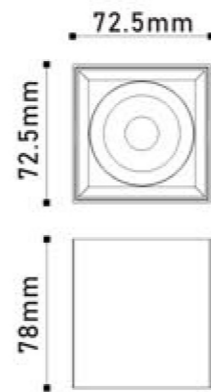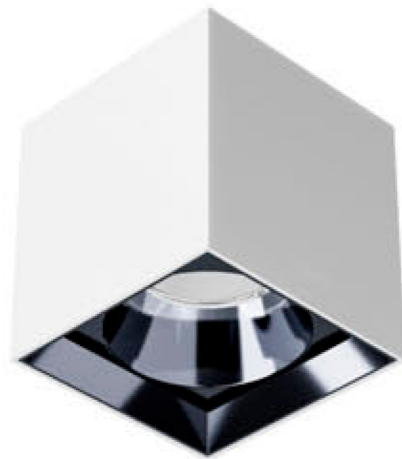

Colors:





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110902	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

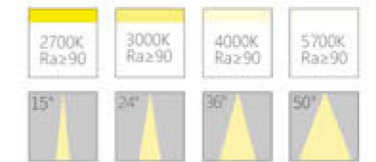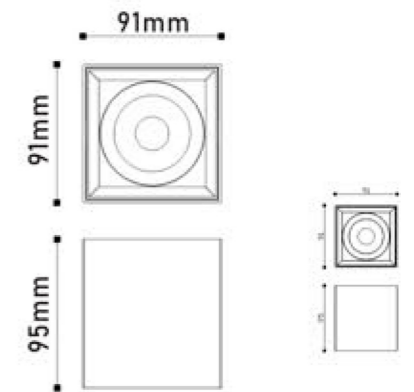


Colors:





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110904	20W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

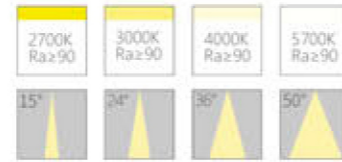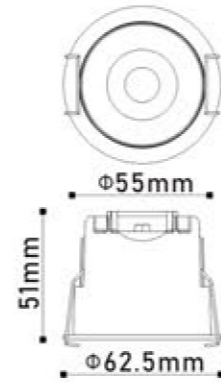

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110905	8W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°


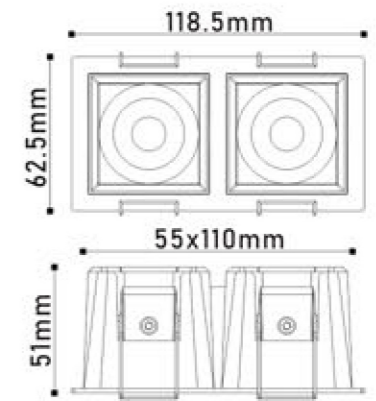


Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110907	16W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

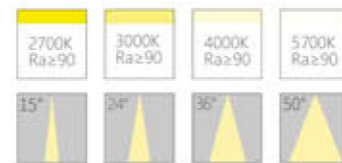
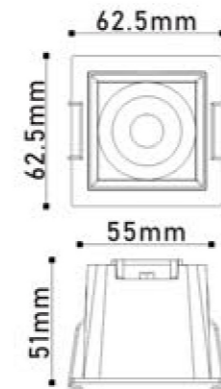


Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110906	8W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°





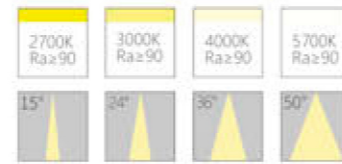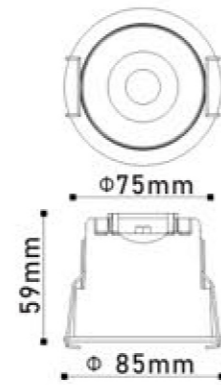


Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110909	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

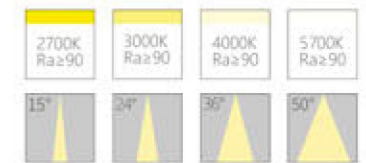
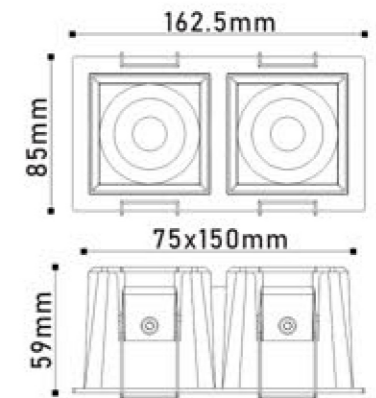


Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110911	24W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

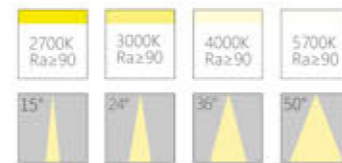
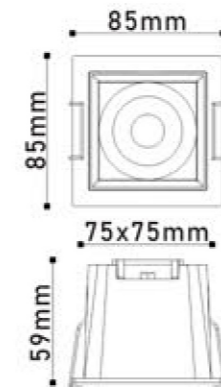


Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110910	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°


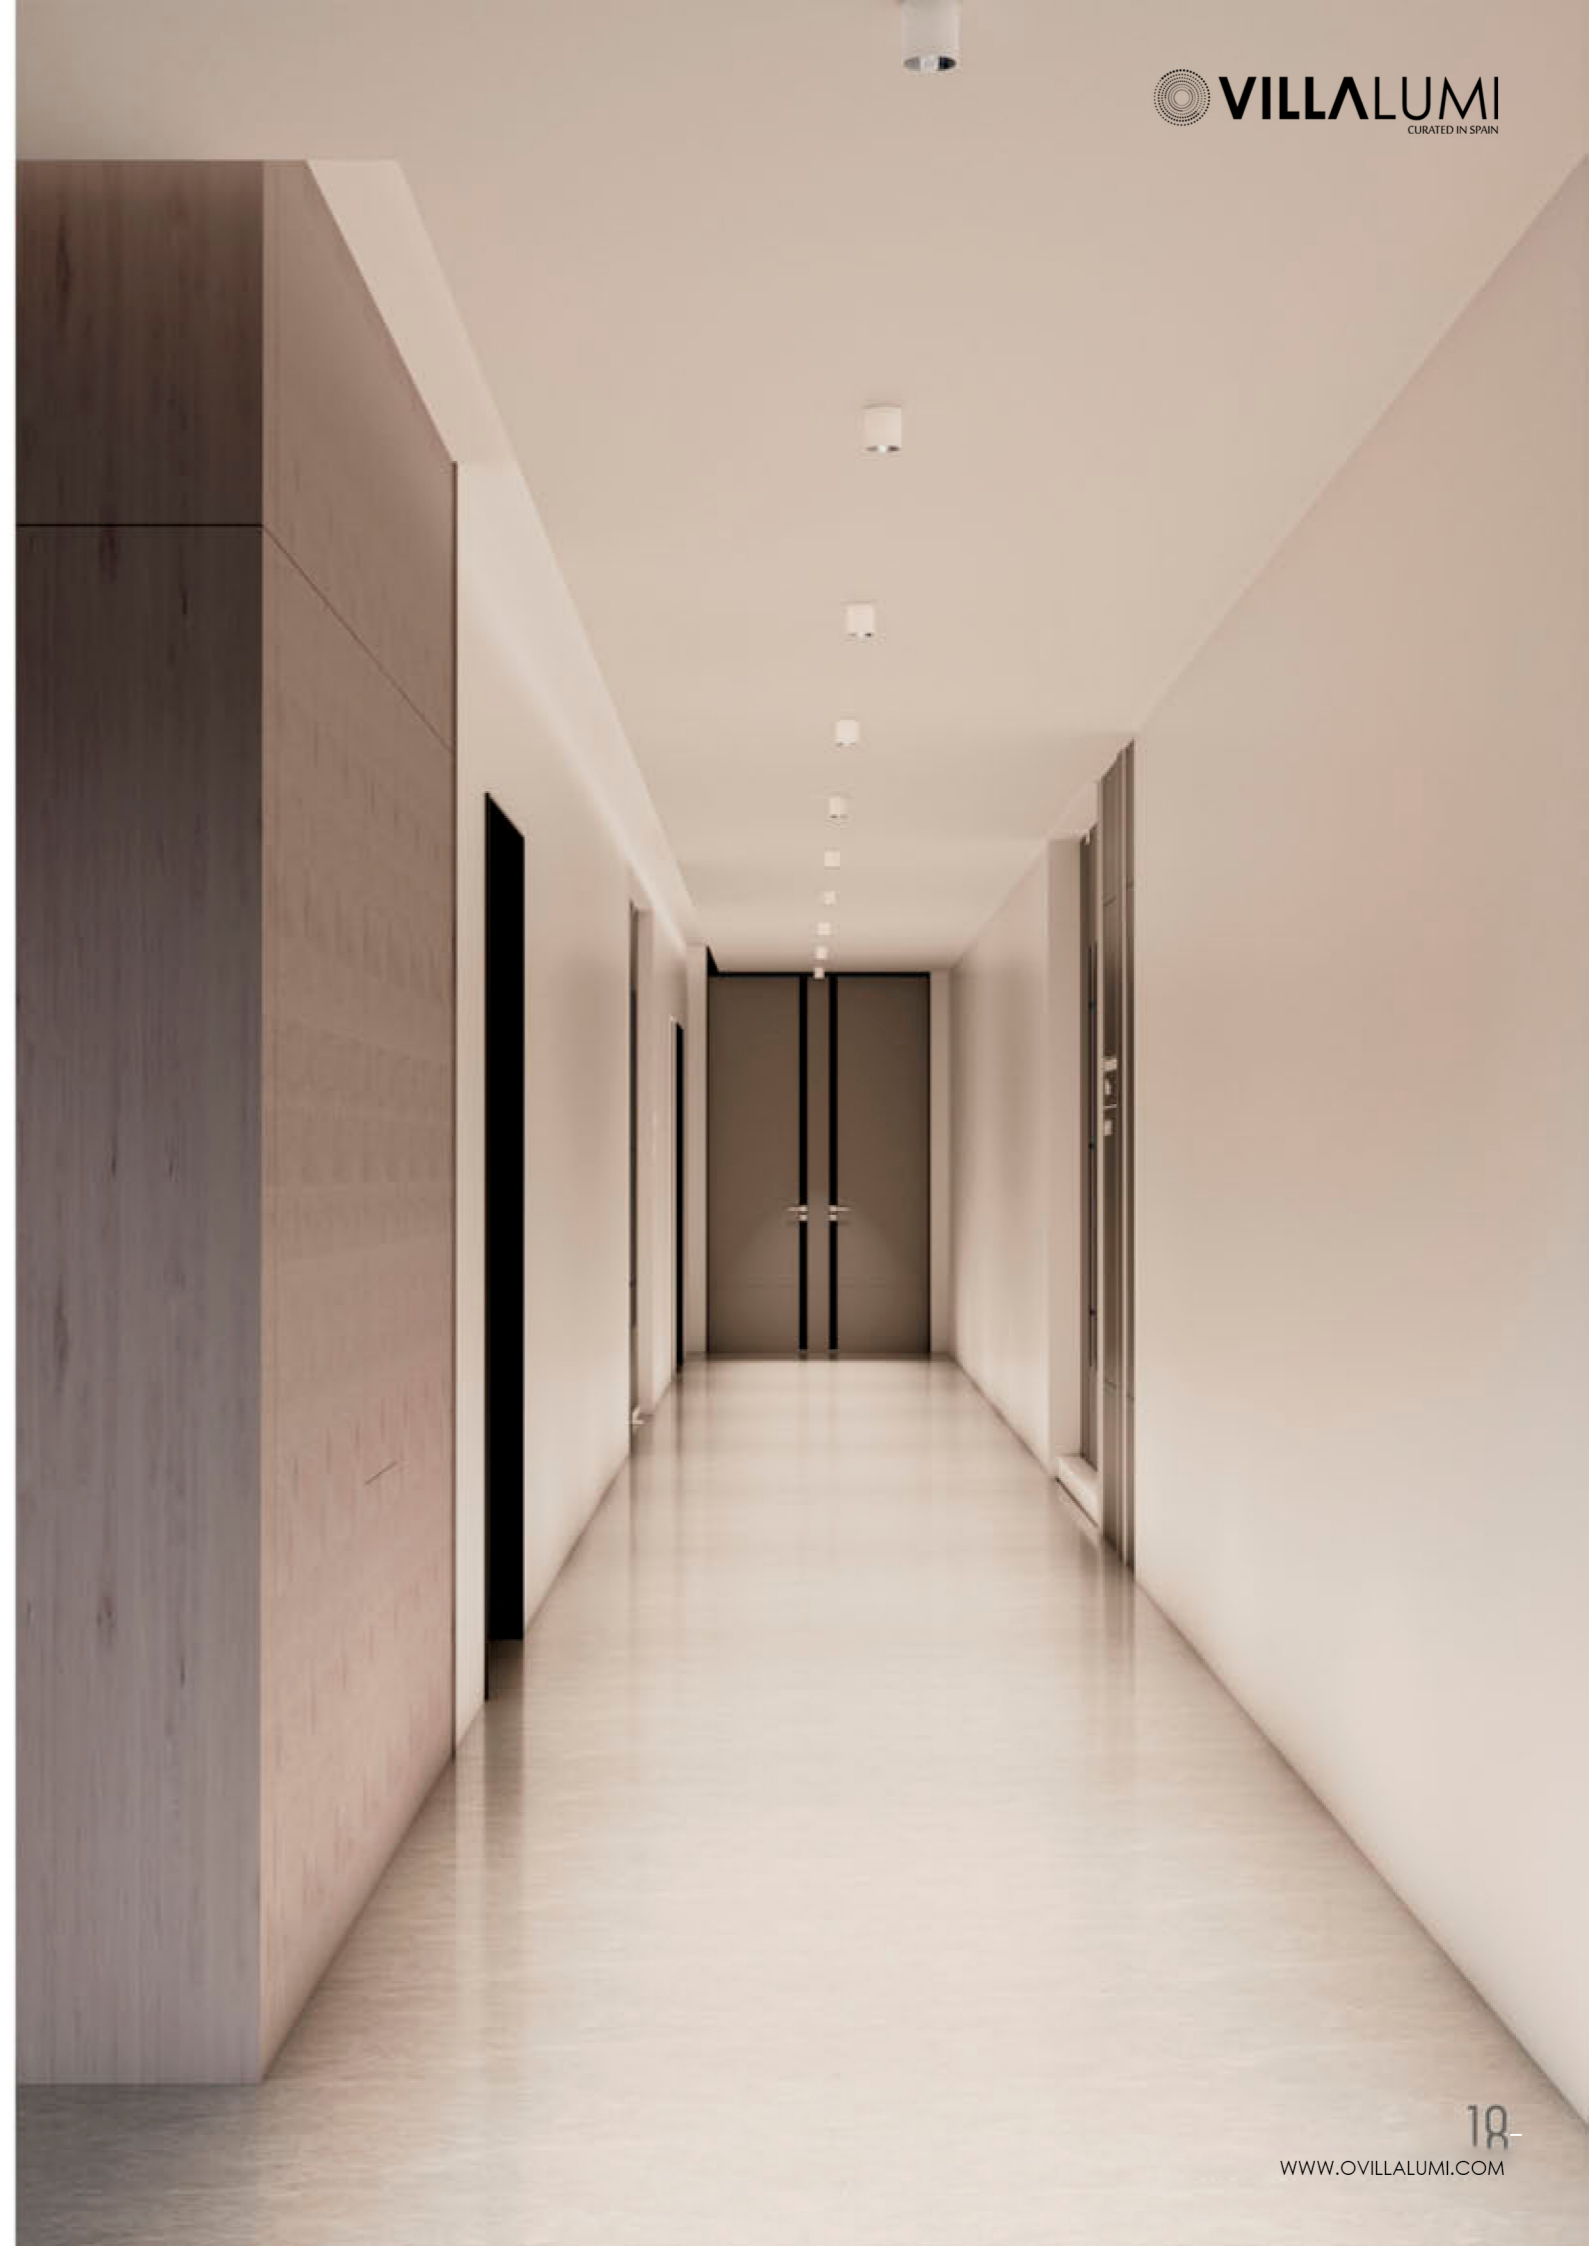


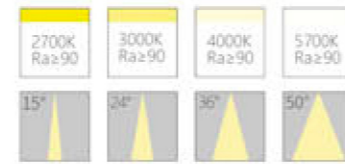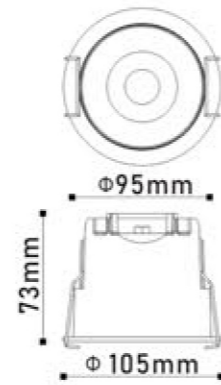



Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110912	20W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

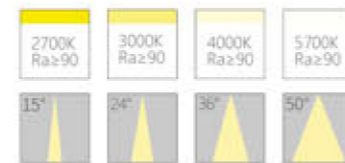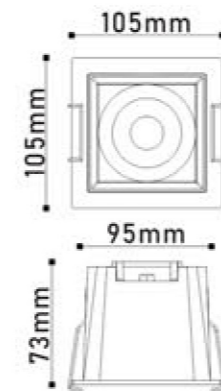




Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110913	20W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

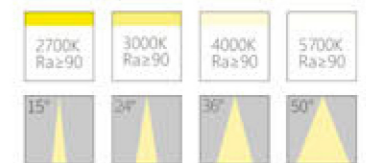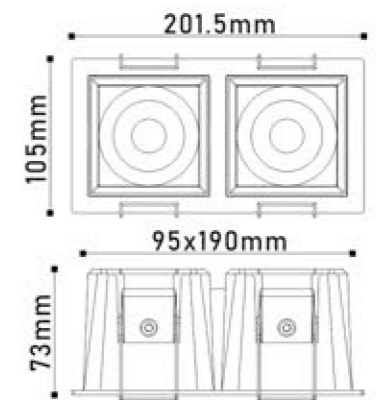



Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110914	40W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

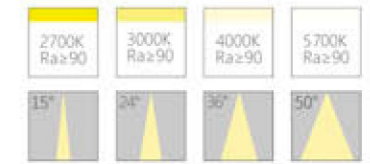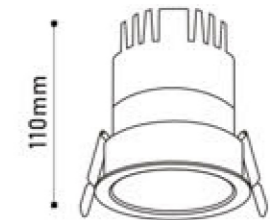

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110915	20W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

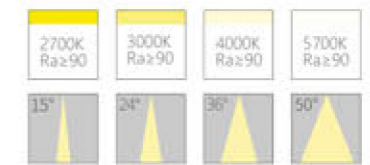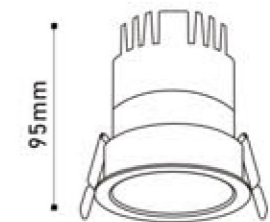



Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110916	15W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

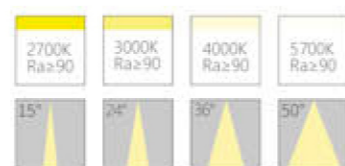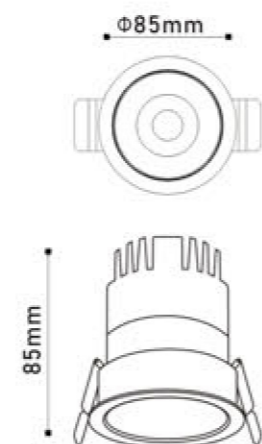

Colors: Black Bright Silver Fog Silver Matte black Matte white Gold



Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110917	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

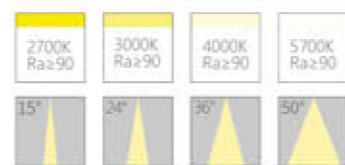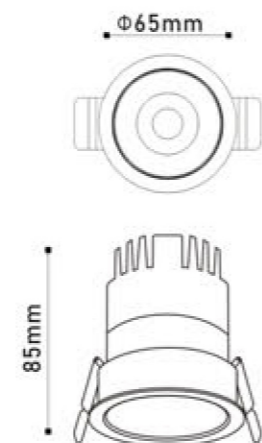



Colors: Black Bright Silver Fog Silver Matte black Matte white Gold





Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110918	8W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°



ADJUSTABLE ANGLE

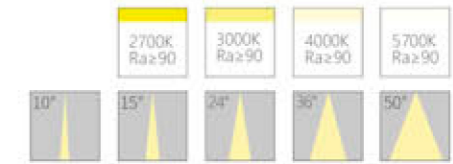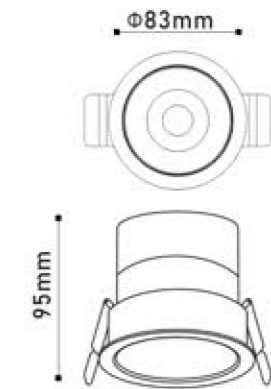

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110919	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°

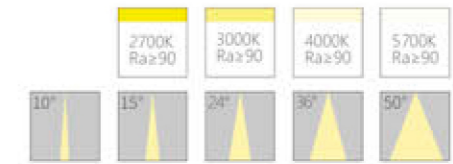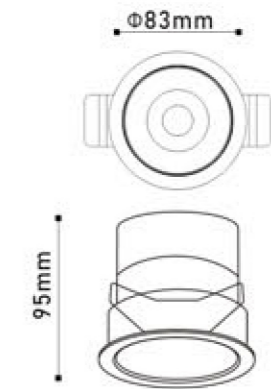

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110920	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°



Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110921	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110923	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°



Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110922	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°





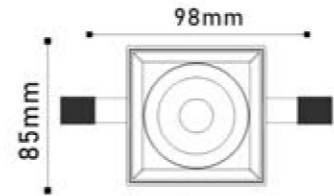

Colors:






Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110924	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°

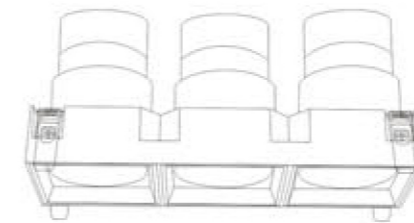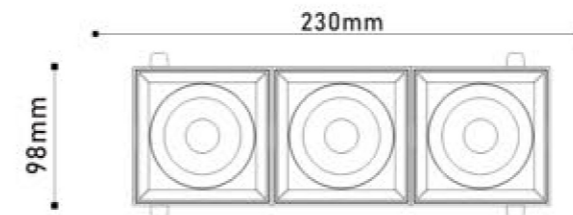

Colors:





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110926	3x12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°

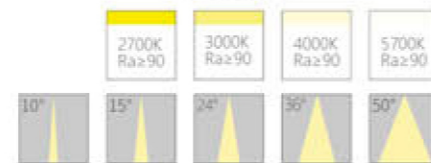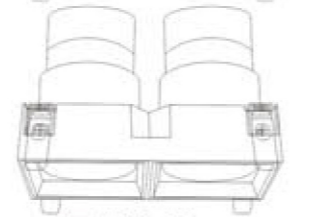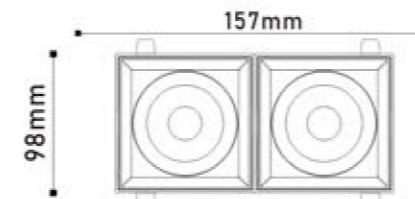

Colors:






Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110925	2x12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°



Colors:






Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110924	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°

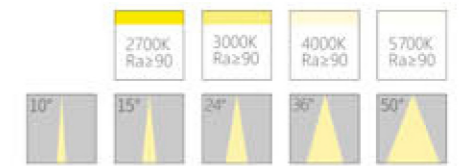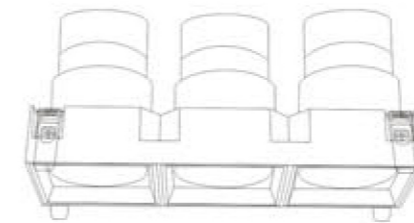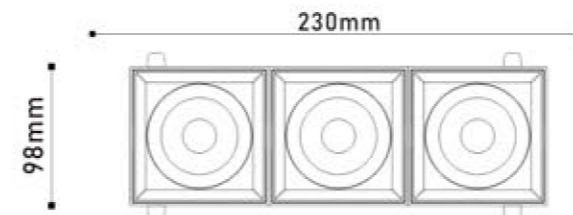

Colors:




Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110926	3x12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°

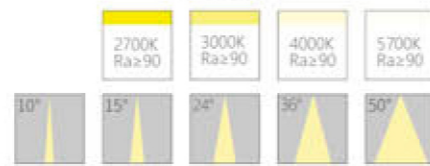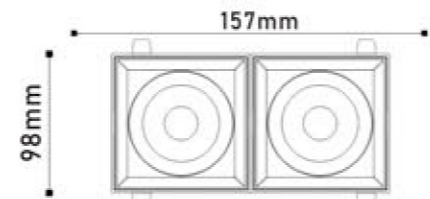


Colors:



Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110925	2x12W	LED	2700k/3000k/4000k/5700k	Ra≥90	10°/15°/24°/36°/50°

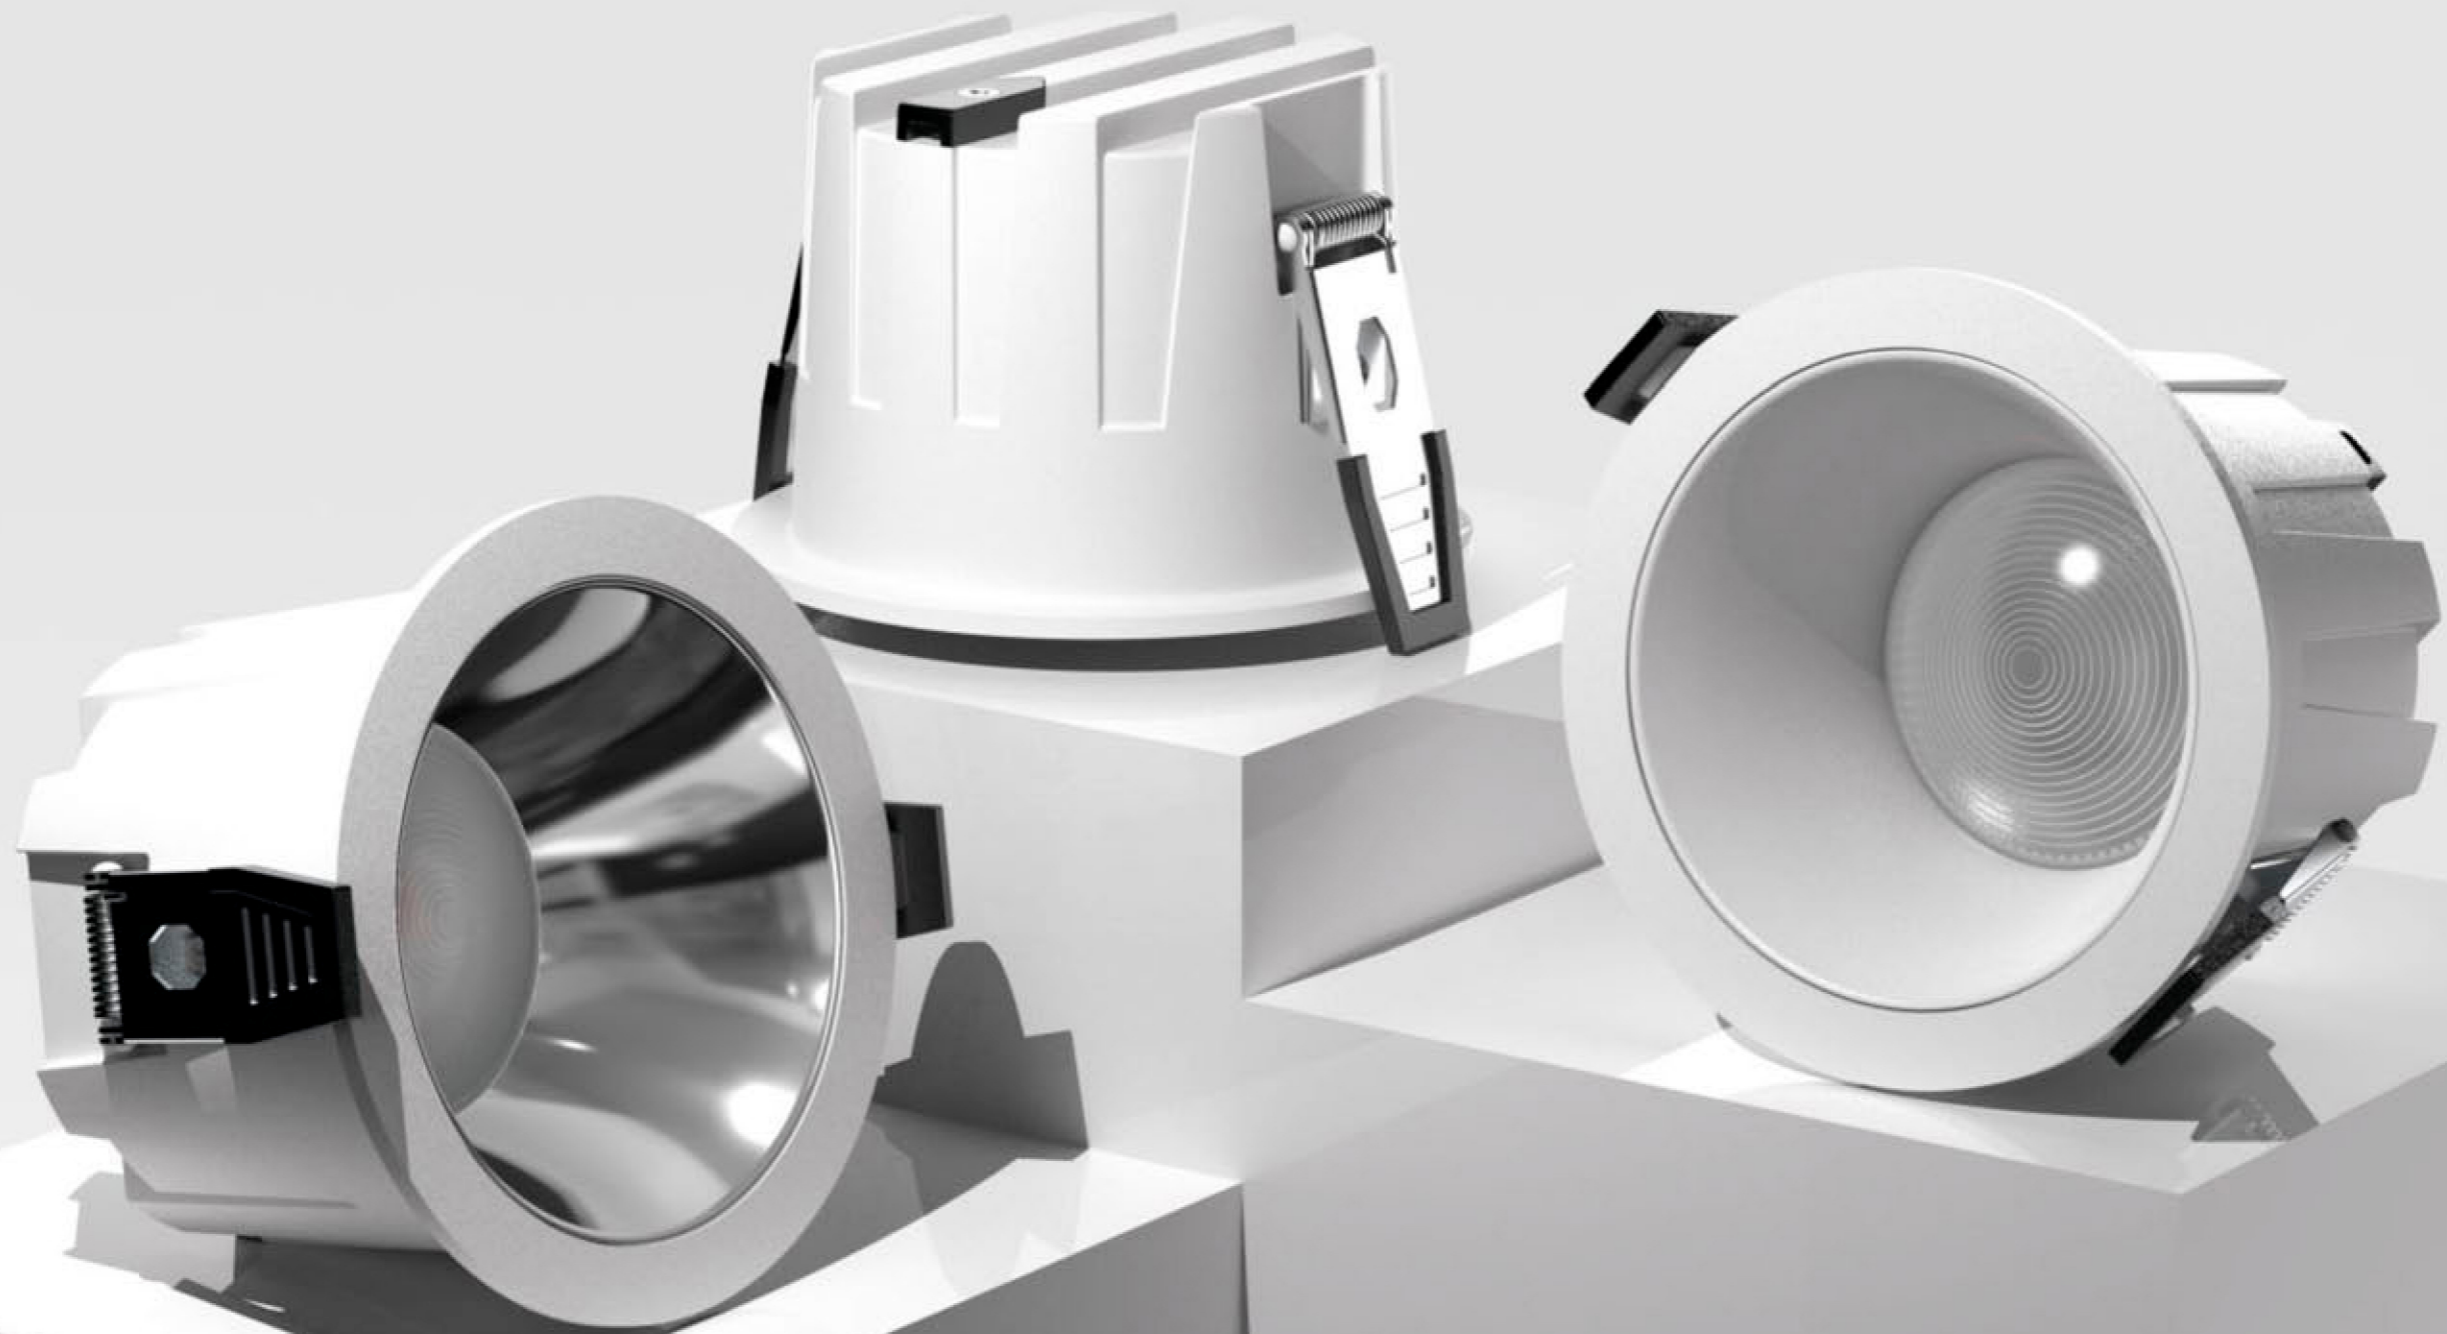


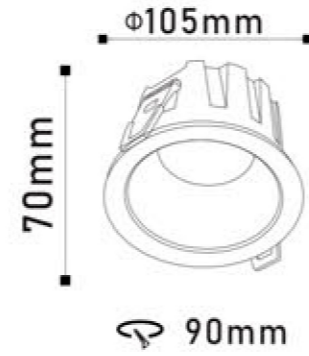

Colors: Black Matte black Matte white



Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110930	18W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

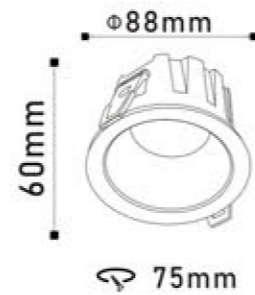


Colors: Black Matte black Matte white



Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110931	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°




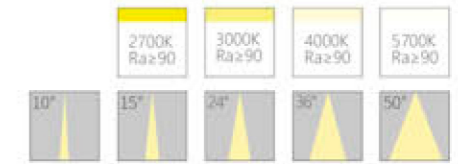

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110932	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110933	8W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

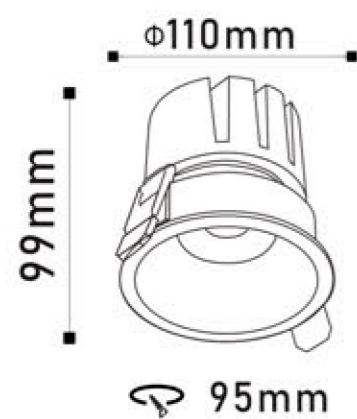

Item No.	Power	Lamp	Color Temperature	CRI	Optical Angle
110934	20W	LED	2700k/3000k/4000k/5700k	Raz90	15°/24°/36°/50°





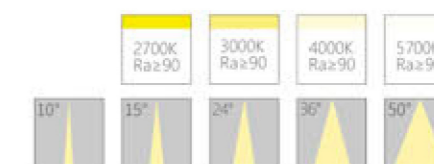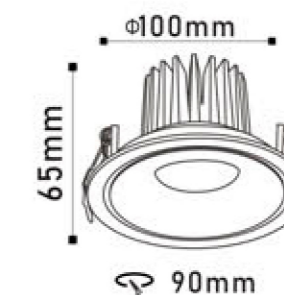

Colors:




Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110935	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

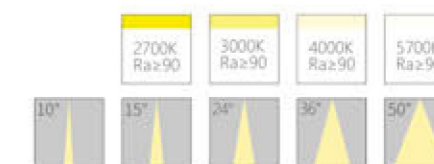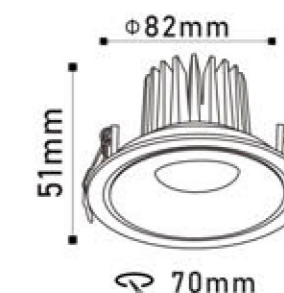

Colors:





Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110936	5W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

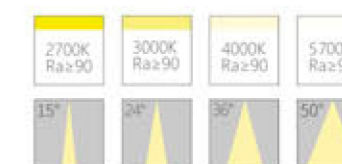

Colors: Black Bright Silver Fog Silver Matte black Matte white Gold

CE ROHS IP20

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110937	12W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

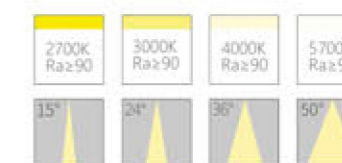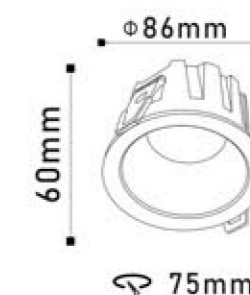

Colors: Black Bright Silver Fog Silver Matte black Matte white Gold




CE ROHS IP20

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110938	7W	LED	2700k/3000k/4000k/5700k	Ra≥90	15°/24°/36°/50°

LATTICE




Colors:  Sand black  Sand white

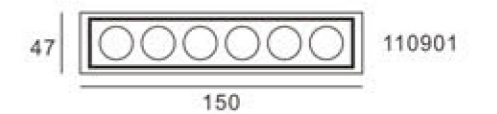

Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110939	3x1.5W	LED	2700k/3000k/4000k/5700k	Ra≥90	30°
110940	6x1.5W	LED	2700k/3000k/4000k/5700k	Ra≥90	30°
110941	12x1.5W	LED	2700k/3000k/4000k/5700k	Ra≥90	30°




Item No.	Power	lamp	Color Temperature	CRI	Optical Angle
110942	3W	LED	2700k/3000k/4000k/5700k	Ra≥90	30°



Colors: Sand black Sand white




Item No.	Power	Color Temperature	CRI	Optical Angle
110943	3W	2700k/3000k/4000k/5700k	Ra≥90	30°

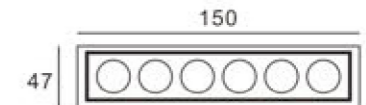

Colors: Sand black Sand white



Item No.	Power	Color Temperature	CRI	Optical Angle
110944	3W	2700k/3000k/4000k/5700k	Ra≥90	30°

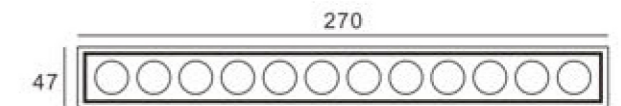

Colors: Sand black Sand white



可拉伸系列


STRETCH SERIES

STRETCH GRILLE LIGHTS




Item No.	110945
Power	2W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	40x35mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110946
Power	4W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	68x35mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110947
Power	6W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	96x35mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110948
Power	10W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	156x35mm

CE ROHS IP20 Colors: Sand black Sand white



STRETCH SERIES

STRETCH GRILLE LIGHTS




Item No.	110949
Power	2W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	40x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110954
Power	2W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	40x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110950
Power	4W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	65x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110955
Power	4W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	65x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110951
Power	6W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	90x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110956
Power	6W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	90x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110952
Power	10W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	150x35mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110957
Power	10W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	150x35mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110953
Power	20W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	300x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110958
Power	20W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	300x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110959
Power	2W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	46x46mm

CE ROHS IP20 Colors: Sand black Sand white

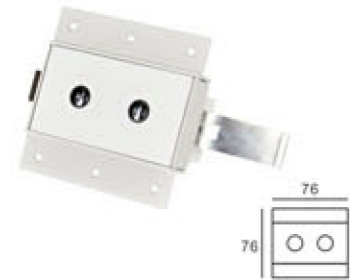


Item No.	110960
Power	4W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	76x46mm

CE ROHS IP20 Colors: Sand black Sand white

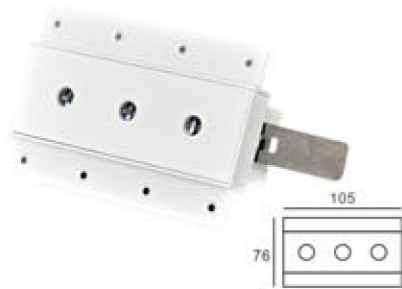


Item No.	110961
Power	6W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	106x46mm

CE ROHS IP20 Colors: Sand black Sand white

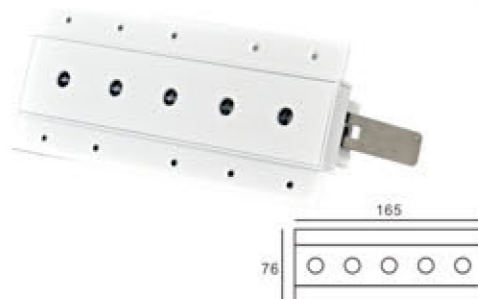

Item No.	110962
Power	10W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	166x46mm

CE ROHS IP20 Colors: Sand black Sand white

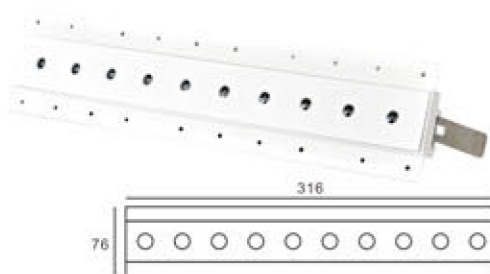

Item No.	110963
Power	20W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	316x46mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110964
Power	2W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	40x35mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110965
Power	4W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	65x35mm

CE ROHS IP20 Colors: Sand black Sand white

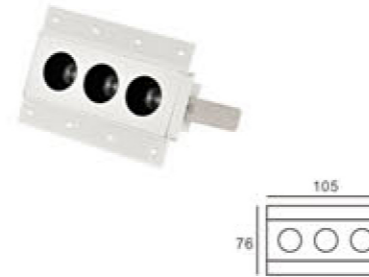


Item No.	110966
Power	6W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	90x35mm

CE ROHS IP20 Colors: Sand black Sand white

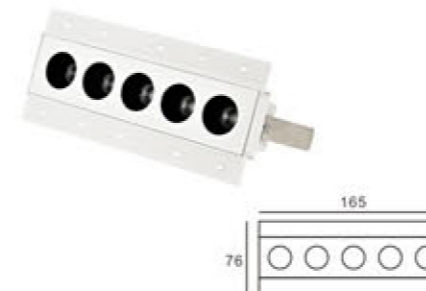

Item No.	110967
Power	10W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	150x35mm

CE ROHS IP20 Colors: Sand black Sand white

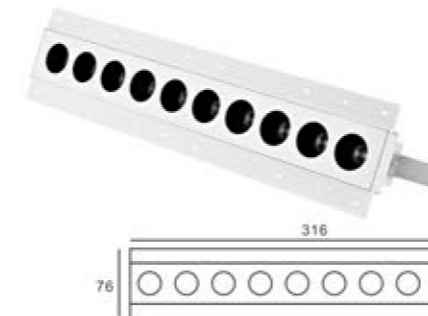

Item No.	110968
Power	20W
Beam angle	30°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	300x35mm


CE ROHS IP20 Colors: Sand black Sand white






Item No.	110969
Power	1x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	37x37mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110970
Power	2x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	67x37mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110971
Power	5x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	139x37mm

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110972
Power	10x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	272x37mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110973
Power	15x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	403x37mm

CE ROHS IP20 Colors: Sand black Sand white




LATTICE

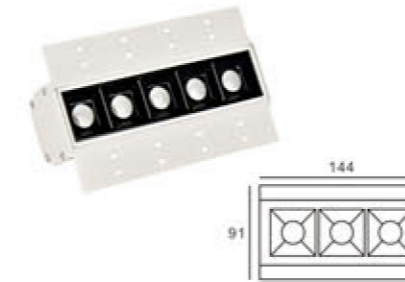


Item No.	110984
Power	5x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	144x45mm

CE ROHS IP20 Colors: Sand black Sand white

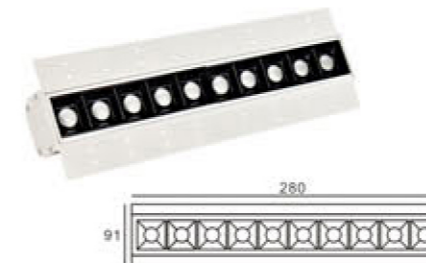

Item No.	110985
Power	10x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	280x45mm

CE ROHS IP20 Colors: Sand black Sand white

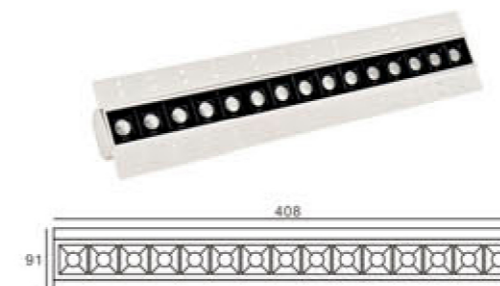

Item No.	110986
Power	15x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	408x45mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110987
Power	5x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	140x45mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110988
Power	10x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Opening size	273x45mm

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110989
Power	3x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Installation mode	Surface mounted

CE ROHS IP20 Colors: Sand black Sand white




Item No.	110990
Power	5x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Installation mode	Surface mounted

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110991
Power	10x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Installation mode	Surface mounted

CE ROHS IP20 Colors: Sand black Sand white



Item No.	110992
Power	15x2W
Beam angle	15°/24°/38°
Color Temperature	2700K/3000K/4000K/5700K/6000K
Light efficiency	57lm/W
CRI	≥90
Installation mode	Surface mounted

CE ROHS IP20 Colors: Sand black Sand white



VILLALUMI

CURATED IN SPAIN